

அருள்மிகு தண்டாயுதபாணி சுவாமி திருக்கோயில், பழநி.
ஒப்பந்தப்புள்ளி அறிவிப்பு எண்.1316/2022/இ3, நாள்.15.07.2022

இணை ஆணையர்/செயல் அலுவலர், அருள்மிகு தண்டாயுதபாணி சுவாமி திருக்கோயில், பழநி அவர்களால் மூடி முத்திரையிடப்பட்ட ஒப்பந்தப்புள்ளிகள் பொதுப்பணித்துறையில் பதிவு பெற்று நடப்பு சான்றிதழ் பெற்றுள்ள ஒப்பந்தகாரர்களிடமிருந்து கீழ்காணும் பணிக்கு வரவேற்கப்படுகிறது.

வ. எ	பணியின்பெயர்	பணியின் தோராய மதிப்பு (இலட்சத்தில்)	முன்வைப்புத் தொகை ரூ.
(1)	(2)	(3)	(4)
1.	ஒட்டன்சத்திரம், அருள்மிகு குழந்தைவேலப்பர் திருக்கோயிலில் காவடி மண்டபத்தின் முதல் தளத்தில் குறிஞ்சி திருமண மண்டபம் கட்டும் பணி மற்றும் தரைத்தளத்தில் உள்ள முத்துக்குமாரர் திருமண மண்டபத்தை மராமத்து செய்யும் பணி.	66.15	43,000/-

- ஒப்பந்தப்புள்ளி சமர்ப்பிக்க இறுதி நாள்:05.08.2022 பிற்பகல் 3.00 மணி வரை மற்றும் அன்றே பிற்பகல் 4.00 மணிக்கு திறக்கப்படும்.
- www.tenders.tn.gov.in மற்றும் www.hrce.tn.gov.in ஆகிய இணையதளங்களில் ஒப்பந்தப்புள்ளி படிவத்தினை கட்டணமின்றி பதிவிறக்கம் செய்து கொள்ளலாம். திருத்தங்கள் மேற்படி இணையதளத்தில் மட்டுமே வெளியிடப்படும்.
- ஒப்பந்தப்புள்ளி படிவம் கிடைக்கப் பெறும் காலம்:19.07.2022 முதல் 04.08.2022 வரை மற்றும் ஒப்பந்தப்புள்ளி படிவத்தின் விலை ரூ.15,000/- + 1,800 GST
- இந்து மதத்தை சார்ந்த ஒப்பந்தகாரர்கள் மட்டுமே ஒப்பந்தப்புள்ளியில் கலந்து கொள்ளலாம்.

(ஓம்) நா.நடராஜன்

இணை ஆணையர்/செயல் அலுவலர்

/உண்மைநகல்/உத்தரவுப்படி/

செயற்பொறியாளர்

நகல்:-


- அறிவிப்புப்பலகை
- இணைஆணையர்/செயல்அலுவலர் (மேஜைபிரதி)
- உதவிஆணையர்/நேர்முகஉதவியாளர்
- மேலாளர்
- செயற்பொறியாளர்
- உதவிசெயற்பொறியாளர் (சிவில்)
- உதவிசெயற்பொறியாளர் (மின்)
- முதுநிலைகணக்குஅலுவலர்
- இளம்பொறியாளர்
- மிகை.

தலைமைஅலுவலகம்

"
"
"
"
"
"
"
"
"

ARULMIGU DHANDAYUTHAPANI SWAMY TEMPLE, PALANI

TENDER DOCUMENT

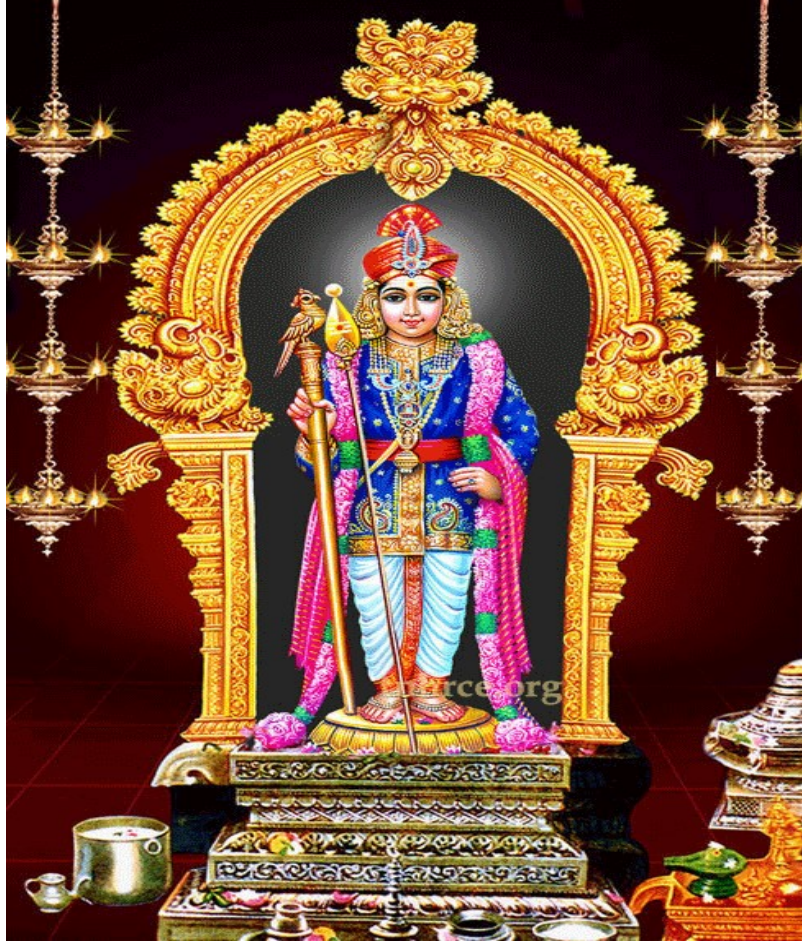

Name of Work

: Construction of Kurunji Marriage Hall and
Renovation work for Muthukumarar Marriage
Hall in Arulmigu Kulanthaivelappar Thirukovil
at Ottanchathiram.

**Total Number of Pages in the
Tender Document**

: 80 Pages (Eighty Pages only)

Number of items in the schedule : 61 Items only (Sixty one Items only)

Tender Date

: 05.08.2022

E.M.D

: Rs.43,000/-

Issued To / Downloaded By

ANNEXURE
PARTICULARS TO BE FURNISHED BY TENDERERS

1. Name and address of tenderer :
2. Name of work : Construction of Kurunji Marriage Hall and Renovation work for Muthukumarar Marriage Hall in Arulmigu Kulanthaivelappar Thirukovil at Ottanchathiram.
3. Date of Tender : 05.08.2022
4. Total value of Tender :
5. Details about E.M.D. Enclosed for the tender and its validity **including the Goods and Service Tax (GST amount)** : Rs.43,000/-
6. Registered class of the tenderer with monetary limit and department in which registered (certified copy of the Registration should be attached. }
7. Recent works executed (Details about name, place of work, value of the works, etc., should be furnished. }
8. Command of labour in brief :
9. Turn over of previous years (particulars for a period of three consecutive years to be furnished) }
10. Whether Income Tax clearance certificate is enclosed ; if not when it will be produced. }
11. Whether **Service Tax (GST) registration is enclosed. If not when will it be enclosed?** }

12. Technical Assistant Details :

1. Name :
- Qualification certificate :
- Experience :

2. Name :
- Qualification certificate :
- Experience :

(OR)

3. Name :
- If retired Civil Engineer Designation
and date of retirement.
(Copy enclosed)

4. If any other particulars :

SPECIAL INSTRUCTIONS TO THE TENDERERS

Part – I

1. The tenderer should fill up the Annexure to the Tender schedule furnishing there to the required information.
2. The tenderers should furnish the particulars of name, address and technical qualification of the Technical Assistant proposed to be employed by them to look after the execution of this work as per terms and conditions of the contract.
3. All pages of the tender should be signed by the tenderer and corrections in rates should be duly attested by them.
4. A copy of the tenderers registration in P.W.D., as a contractor shall be attached with the tender.

The tenderer should furnish the copy of Goods and Service Tax (GST) Registration No.

5. **The Civil contractors should furnish electrical license issued by Electrical Licensing Board, Government of Tamilnadu. The Civil contractors does not have electrical license should furnish on undertaking from the Electrical Engineer, who is having Electrical License issued from Electrical Licensing Board, Government of Tamilnadu and stating that the concerned Electrical works will be executed under his supervision vide G.O.(Ms) No. 16 / Public works (G2) Dept., /dated 17.01.2018.**
6. Current Income Tax Clearance Certificate shall be enclosed with the tender.
7. The following particulars shall also be furnished by the contractor along with the tenders.
 - a. A list of details of works execution by the contractors with their value.
 - b. A list of details of works under execution by the contract with their values.
 - c. Annual turn over of the contractor for the last one year. Necessary certificate to the effect issued by the respective Bank shall be attached.

Part-II

1. The tenders should carefully go through the tender schedule and quoted their rates for all times.
2. The rates **excluding GST** should be filled in neatly in figures and in words and taking into account the metric units specified in the tender, scribing, over writings and erasing should be avoided as far as possible.
3. The amount of each item of work should be worked out. Proper care must be taken in working out the amount of each item of work taking into account the unit for which the rates quoted and the quantity of work to be done under the item.
4. The total form each page should be arrived at and carried over to every page and the grand total value of work should be worked out and shown at the end.
5. **The tenderer shall quote the rates and prices (both in figure and words) for all the items of the works described in the bill of quantities excluding GST along with sum of the quoted tender value excluding GST at the end (both in figure and words).**
6. The tender should be submitted along with the covering letter giving full details as called for in the tender notice and with particulars of following items.
 - a. Whether they are registered contractors if registered together with the copy or letter registering them in the appropriate class.
 - b. Details of the Earnest Money Deposit remitted in Demand Draft only.

In case the tenderers are eligible for concessional Earnest Money Deposit and accordingly they have tendered their No. and details from which the concession was granted to them to be specified and if possible a copy of this aforesaid reference may be enclosed along with the tender for ready reference.

- c. Details of previous work done by the tenderers covering the cost of work the agreement No and date, the Department in which the work was carried out etc., so as to assess the previous experience of the tenderers at once as also make an easy for reference to their record of every year details should be furnished so as to see that the tenderers have minimum experience of major buildings.
- d. List of various machinery and other equipments at the tenderer disposal for use in the execution of the work.

- e. The tender form should be filled in while submitted the tender. The tenders submitted without filling up the tender form is liable to be rejected.
 - f. The certificates showing the annual turn over of the Contractor for the last one year issued by the respective bank shall be attached.
7. The tenders must be submitted in a foolscap cover there by duly signing all the conditions. Plans and schedule issued and tender documents.
8. If at any time the Joint Commissioner/Executive Officer shall be of the opinion that the contractor is delaying commencement of the work or violating any of the progress or work as defined by the tabular statement "Rate of progress" in the "Articles of Agreement", The Joint Commissioner/Executive Officer shall so advice the contractor in writing and at the same time demand compliance. If the contractor neglects to comply with such demand within 7 days after the receipt of such notice it shall them or at any time. There after be lawful for the Joint Commissioner/Executive Officer to determine the contract which determination shall carry with the forfeiture of the Security Deposit and total of the amount with held from the final bill together with value of such work as may have been executed and not paid for such proportion of such total sums as shall be assessed by the Joint Commissioner/Executive Officer .

TENDER FORM

To
Joint Commissioner/Executive Officer,
Arulmigu Dhandayuthapani Swamy Temple,
Palani.

Sir,

I/we do hereby tender and if this tender be accepted undertake to execute the following works viz.....

As shown in the drawings and describing in the specifications deposited in the office of the Joint Commissioner/Executive Officer, Arulmigu Dhandayuthapani Swamy Temple, Palani. of

Temple with such variations by way of alterations (or) additions to and omission from the said works and method of payment are provided for in the “Conditions of contract for the sum of Rupees (to be entered in words and figures.)

Or such other sum as may be arrived at under the clause of the General conditions to contract relating to payment on lumpsum basis or by final measurements at unit prices”.

2. I/we have also completed the priced list of items in schedule “A” annexed (in words and figures) for which I/we agree to execute the work and receive payment on measured quantities as per the general conditions to the contract.

3. I/We do hereby distinctly and expressly declare and acknowledge that before the submission of my/our tender, I/We have carefully followed the instructions in the tender notice and have read the Tamilnadu building practice and the general conditions to the contract there in and the Tamilnadu building practice addenda contract volume; and that I/We have made such examination of the contract documents and of the plans, specifications, quantities and of the location, where the said work is to be done, and such investigation of the work required to be done and regard to the materials required to be furnished as to enable me/us to thoroughly understand the intention of the same and the requirement, Covenants, stipulations and restrictions contained in the contract and in the said plans and specifications and distinctly agree that I /we will not here after make any claim or demand upon the Temple based upon or arising out of any alleged misunderstanding or misconception or mistake or my/our. Part of the said requirements, covenants, stipulations restrictions and conditions.

4. I/We beings a registered Public Works Department contractor enclose an income Tax verification certificate have already produced an Income Tax verification certificate during the current calendar year in respect of (here particulars of the previous occasions on which the certificate was produced should be given). The legal address of the contractor for service of all letters and notices will be as follows:

5.(i)(a) I / We enclose herewith a challan for the payment of the sum Rupees
.....as Earnest Money not to bear interest (to be entered in words and figures).

5.(i) (b) I/ We have paid Rs.....(Rupees.....
..... only as against the E.M.D. of Rs. (Rupees
..... only) Since I am/we are and eligible to pay the E.M.D., at concessional rates.

5.(i)(c) in lieu of cash deposits, I / We have enclosed a
..... bearing No. Date
..... issued by for a
value of Rs. (Rupees
..... only) drawn/endorsed/pledged in favour of
the Executive Officer,

5.(i)(d) I am /We are an
hence exempted from payment of E.M.D.

6. If my / our Tender is not accepted, this sum shall be returned tome / us on my / our applications when intimation is sent to me/us for rejection or at the expiration or ninety days from the date of this tender, whichever, is earlier. If my/our tender is accepted, the Earnest Money Deposit shall be retained by the Temple as security for the due fulfillment of the contract. If upon intimation being given to me/us by the authority authorized by the Government under article 299 (i) of the constitution (herein after called the accepting authority) of acceptance of my/our tender, I /we fail to make the additional security deposit, or to enter into required agreement (as specified in class IV of the tender notice) then I/We agree to the forfeiture of the Earnest Money Deposit. Any notice required to be served on me/us hereunder shall be sufficient served on me/us if delivered to me us personally or forwarded, to me/us by post to (Registered or ordinary) or left at the mail address given herein. Such notice shall, if sent by post be deemed to have been served, on me/us at the time when indue course of post, it would be delivered at the address to which it is sent.

7. I/We fully understand that on receipt of communication of acceptance of tender, from the accepting authority there emerges a valid contract between me/us and the Governor of Tamilnadu and the tender documents i.e., tender notice, tender with schedules. General conditions to the contract and special conditions of the tender, negotiation letter, communication of acceptance to tender, shall constitute the contract for this purpose and be the foundation of rights of both the parties, as defined in clauses (iv) of tender notice, provided that, it shall be open to the accepting, authority to insist on execution of any written agreement by tenderer, if administratively considered necessary or expedient.

8. I/We have also signed the copy of the Tamilnadu building practice and national building code and addenda volume thereto, maintained in the Temple Office, in acknowledgement of being bound by all conditions of the clauses of the General conditions to the contract and all specifications for items of work described by a specification number in Schedule “A”.

9. In consideration of the payment of Rupees of such other sum as may be arrived at under the clause of the General conditions to the contract relating to payment of lumpsum basis or by final measurement at unit prices I/We agree, subject to said conditions to execute and complete the works shown upon the said drawing serially from Number 1 to inclusive (schedule B) and described in the specifications (Schedule C) and to the extent of probable quantities shown in the (schedule-“A”) with such variations by way of alteration of, additions to or deductions from the said work method of payment therefore as are provided for in the said conditions.

10. The term “Joint Commissioner/Executive Officer” in the said conditions shall mean the officer incharge of the Temple having jurisdiction for the time being over the work, who shall be competent to exercise, all the powers and privileges reserved herein in favour of the Government with the previous sanction of or the subject to ratification by the competent authorities in case where such sanction or ratification may be necessary and who has been duly authorized under Article 299(1) of the constitution.

11. I / We agree that the time shall be considered as the essence of this contract and to commence the work, as soon as this contract is accepted by the competent authority as defined by the Tamilnadu Public Work Department Code and the site (or premises) is handed over to me/us as provided for in the said conditions and agree to complete the work within **6 (Six) months** from the date of such handing over of the site (or premises) and show progress as defined in the tabular statement “**Rate of progress**” subject nevertheless to the provision for extension of time contained in clause 56 of the General conditions to the contract appended to Tamilnadu building practice.

12. I /We agree that upon the terms and conditions of this contract, being fulfilled and performed to the satisfaction of Executive Engineer, the Security deposited by me/us as herein before cited or such portion thereof, as I/We may be entitled to, under the said conditions be paid back to me/us as provided in clause 64 of the General conditions to the contract.

13. I am/We are professionally qualified and my/our qualifications are as follows:

I/We in pursuance of clause 18 of tender notice under take to employ the following technical staff for supervising the work and will see that one of them is always at site during working hours personally checking all items of works and playing extra attention to such works as may require special attention (e.g) reinforced cement concrete works.

S. No.	Name of technical staff proposed to be employed	Qualification and experience
1.		
2.		
3.		
4.		

14. I /We agree that the Arbitrator for fulfilling the duties set forth in the Arbitration clause of the General conditions to the contract shall be

1. The Joint Commissioner/Executive Officer, Arulmigu Dhandayuthapani Swamy Temple, Palani in case the value of claim does not exceeded Rs.50,000/- (Rupees fifty thousand only).
2. And through the competent civil court if they value of claim is more than Rs.50,000/-.

Signature of the contractor with date

15. In pursuance of negotiation with the Joint Commissioner/Executive Officer
..... of Temple on

I /We, agree to reduce the rates for the items in the schedule as follows:

Sl. No.	Item No.	Schedule	Reduced rate per unit

Date :

Signature of Contractor

ADD NEW CONDITIONS FOR GOODS AND SERVICES TAX (GST)

The Government of India has notified vide Notification No. 20 / 2017 – Central Tax (Rate), dated 22nd August, 2017 and Notification 21 No.24 / 2017 – Central Tax (Rate), dated 21st September, 2017, the concessional rate of the Goods and Services Tax (GST) at 12% [CGST at 6% + SGST at 6%] is leviable for any Government Contract, whether Civil or Electrical, irrespective of the Goods and Services Tax (GST) rate applicable on purchase of goods used in the execution of Government Contract.

And the GST amount will be calculated at 12% from the sum of total tendered value quoted by the tenderer for construction cost (excluding GST) specified in the BOQ, Subject to GST rate applicable from time to time as recommended by the GST Council

“All duties, taxes, and other levies except GST, payable by the contractor under the contract, or for any other cause shall be included in the rates, prices and total Bid Price submitted by the Bidder”

INPUT TAX CREDIT (ITC)

a) As per Notification 202, dated 29.06.2017 and as per sub-section (2) of Section 7 of the Tamil Nadu Goods and Services Act, 2017, (Tamil Nadu Act 19 of 2017), activities or transactions undertaken by State Government shall be treated neither as supply of goods nor a supply of service.

b) As per Chapter IX (Section 41) of the Tamil Nadu Goods and Services Act, 2017, every registered persons may be entitled to take the credit of eligible input tax, as self-assessed, in his return and such amount shall be credited on a provisional basis to his electronic credit ledger.

c) As per PWD Revised SoR (2017-18), dated 21.10.2017, under General Note, 8 (ix), the Contractor is eligible to get refund of excess tax paid over or liable to pay tax for this Contract Work.

TOTAL TENDER PRICE

The total tender price will be the cumulative of value quoted for construction (Total Basic Rate + GST),

The amount of EMD is fixed at 1% of the contract value of work put to tender (including the GST Amount)”

NEGOTIATIONS

The lowest tenderer will be identified who quotes lowest total tender price which including GST as per the clause Negotiation of rates will be made only with the lowest tenderer for reducing the quoted rates and the negotiation will be made for the rates quoted to the items in the construction part alone and not for GST amount.”

“After negotiation with lowest tenderer, the GST amount will be recalculated at 12% of the sum of the Negotiated tender value (excluding GST) for construction Cost specified in the BOQ, subject to GST rate applicable from time to time as recommended by the GST Council.

AWARD OF CONTRACT

To be substantially responsive to the bidding documents and who has offered the lowest evaluated total tender price (Total Quoted Value including the Goods and Services Tax (GST) Amount).

MINIMUM CRITERIA FOR QUALIFICATION

The Applicant should produce Income Tax Clearance Certificate valid for the current period, „VAT Verification Certificate (i.e. previous assessment year) and „TIN number having validity and copy of Goods and Services Tax (GST) Registration No.

Lumpsum Contract

Tender notice

1. The Joint Commissioner/Executive Officer, Arulmigu Dhandayuthapani Swamy Temple, Palani invites tender for the work of **Construction of Kurunji Marriage Hall and Renovation work for Muthukumarar Marriage Hall in Arulmigu Kulanthaivelappar Thirukovil at Ottanchathiram** at his office upto 3.00 PM on **05.08.2022** from the experienced and competent contractors / firms as detailed below.

The tender so received on **05.08.2022** and those received by post upto 3.00 pm on **05.08.2022** will be opened on **05.08.2022** at 4.00 p.m.

The Contractor offer the Tenders should be the Hindu Religious Persons only.

The tenders should be in the prescribed form obtainable from the Joint Commissioner/Executive Officer. The tenders will be opened by the Joint Commissioner/Executive Officer, Arulmigu Dhandayuthapani Swamy Temple, Palani at the place and on the date afore mentioned at 4.00pm. The tender or their agents are expected to be present at the time of opening of the tenders. The tenderer receiving officer will, on opening each tender, prepare a statement of the attested and unattested corrections therein and hand it over to the tenderer concerned and initial all corrections in the presence of the tenderers. If any tenderers of their agents finds it convenient to be presence at the time, then in such a case the tender receiving officer will, on opening the tender of the absentee tenderer, make out a statement of the unattested corrections and communicate it to him. The absentee tenderer shall then accept the statement of the corrections without any question whatsoever.

2. Tenders must be submitted in sealed covers and should be addressed to the Joint Commissioner/Executive Officer, Arulmigu Dhandayuthapani Swamy Temple, Palani the name of the tender and the name of the work being noted on the cover.

If the tender is made by an individual, it shall be signed with his full name and his address shall be given. If it is made by a firm, it shall be signed with the co-partnership name by a member of the firm who shall also sign his own name and the name and address of each member of the firm shall be given, if the tender is made by a corporation, it shall be signed by and authorized officer who shall produce with his tender, satisfactory evidence of his authorization. Such tendering corporation may be required before the contract is executed, to furnish evidence of its corporate existence.

3. Each tenderer must also sent a certificate of Income Tax verification form the appropriate Income-Tax authority in the form prescribed therefore. This certificate will be valid for one year from the date of issue for all tenders submitted during the period. In the case proprietary and partnership firm, it will be necessary to produce the certificate afore mentioned for the proprietors or proprietors and for each of the partner as the case may be.

If the tenderer is a registered P.W.D., contractor and if a certificate for the current for the current year and already been produced by him during the calander year in which the tender is made, it will be sufficient if particulars regarding the previous occasion on which the said certificate was produced are given.

All tenders received without a certificate as aforementioned will be summarily rejected.

4. Each tenders must pay an Earnest money deposit of **Rs.43,000/- (Fourty Three Thousand Only) including the basic rate and Goods and Service Tax (GST)** The earnest money deposit can be paid in Demand Draft only. The earnest money will be refunded to the unsuccessful tender on application, after termination is sent of rejection of the tender or at the expiration of three months from the date of tenders whichever is earlier. The refund will be authorized by the Joint Commissioner/Executive Officer by suitable endorsement on the challan. The earnest money will not be received in cash or currency by the Temple officers, have in exceptional cases. Where there are no Treasuries or banks within the jurisdiction of the officer calling for tenders. When currency notes are given, the tenderer should sign his name in full with date, on the back of all the currency notes given by him, whatever their denominations may be.

Not other mode of payment will be accepted, Bank Guarantee of any kind not be accepted.

5. (i) The tender will remain valid for a period of Ninety days from the last date for receipt of tender. The validity period can be extended further, if the contractor given his consent in writing, specifying the period of extension.

- i. The tenderer whose tender is under consideration shall be attend the Joint Commissioner/Executive Officer office before the end of the period specified by written intimation to him. If the tenderer fails to attend the office before the end of the specified period, his tender will not be considered. He shall forthwith, upon intimation being given to him of acceptance of his tender, by the officer duly authorized in this behalf under article 299(1) of the constitution, herein after called the accepting authority, make security” deposit of 2% of the value of **contract including GST amount** in one of the forms prescribed in Tamilnadu Public works ‘A’ code (i.e. by taking onto account of the amount of earnest money deposit (1% of the estimate cost) already deposited with the tender, it would be sufficient to pay the balance amount to make up the 2% of the value of contract **including GST amount** for the purpose of security deposit) The above additional security deposit at 1% will be produced before signing the agreement. The security deposit to together with earnest money deposit and the amount with held according to clause 64(1) of General conditions to the contract shall be retained as security for due fulfillment of contract. If a cash security is made by the contractor, he shall follow the procedure laid down in the proceedings paragraph for payment of earnest money deposit and such deposit shall not bear any interest.
- ii. On receipt of written communication of acceptance of tender, if the tender fails to pay the requisite security deposit within the period specified in the written communication for back out from the tender or withdraws his tender after acceptance the earnest money deposit shall be forfeited to the temple.

If the contractor to carryout the contract after paying the requisite deposit, then he will be liable for the excess expenditure if any incurred to complete the work as contemplated in the general conditions to the contract.

- iii. It shall be expressly understood by the tenderer that on receipt of written communication of acceptance of tender by the accepting authority, there emerges a valid contract between the Joint Commissioner/Executive Officer and the tenderer for execution of the work without and separately written agreement. Hence for this purpose, the tender documents, i.e. tender notice, tender offered by contractor, general conditions to the contract special conditions to contract negotiation correspondences, written communication of acceptance negotiation correspondences written communication of acceptance of tender etc., shall constitute of valid contract and there will be the foundation of the rights of both the parties to the contract.

Provided that it shall be open to the accepting authority to insist execution of any written agreement by the tenderer, if administratively considered necessary or expedient.

6. The tenderer shall examine clearly the Tamilnadu building practice and also the general conditions to contract contained therein and sign the Divisional office copy of the Tamilnadu Building practice and its addenda volume in token of such study before submitting his tender his tender unit rates, which shall be for finished work in site. He shall also carefully study the drawing and additional specifications and all the documents which form part of the agreement to be entered into by the accepted tenderer. The Tamilnadu building practice and other connected documents with the contract, such as specifications plans descriptive specification sheet regarding materials etc., can be seen at any time between 10 A.M., to 5.45 P.M. of the office days in the office the Joint Commissioner/Executive Officer, Arulmigu Dhandayuthapani Swamy Temple, Palani. A copy of the set of contract documents can also be had on payment or **Rs.15,000 (+) GST 12% Rs.1800/-**.

7. The tenders attention is directed to the requirements, for materials under the clause “Materials and workmanship” in the general conditions to contract, materials conforming to the ISI standards shall be used on the work and the tenderer shall quote his rates accordingly.

8. Every tenderer is expected before quoting his rates, to inspect site of the proposed work. He should also inspect the quarries any satisfy himself about the quality and availability of materials. The best class of materials to be obtained from the quarries or other source defined shall be used on the work. In every case the materials must comply with the relevant standard specifications or in the tender notice, or as required by the Executive Engineer in any case, shall be submitted for the Executive Engineer’s approval before the supply to site of work is begun.

The government will not however, after acceptance of a contract rate pay any extra charges for lead or for any other reason in case the contract or is found later on to have misjudged the

materials available. Attention of the contractor is directed to the standard general condition to contract regarding payment of seigniorage tools etc.

9. The tenders particulars of attention is drawn to section and clauses in the standard general conditions to contract dealing with

1. Test, inspection and rejection of defective materials and work.
2. Carriage
3. Construction plant
4. Water and lighting
5. Cleaning up during progress and for delivery
6. Accidents
7. Delays
8. Particulars of payment

The contractor should closely pursue all the specification clauses which govern the rates, which he is tendering.

10. A schedule of quantities accompanies this tender notice. It shall be definitely understood that the temple does not accept any responsibility on the correctness or completeness of this schedule and that this schedule is liable to alterations by omission deduction or additions at the discretion of the Joint Commissioner/Executive Officer, Arulmigu Dhandayuthapani Swamy Temple, Palani or as set forth in the conditions of contract.

The tenderer will however base his lumpsum tender on this schedule of quantities. In the case of percentage tender system for the work costing upto Rs.100 lakhs, the tenderer should note the tender percentage excess/less (instead of quoting specific rate for each item in the schedule for the works with reference to total estimate value put to tender. In case of other works costing more than Rs.100 lakhs he should quote rate for each item. He should quote specific rates for each item in the schedule and the rate should be in Rupees and in sum of five paise. The rates should be written both in words and figures and unit in works. The tenderer should also show the total of each of and the Grand total of the whole contract and quote in the tender a lumpsum for which he will undertake to do whole work subject to the contract, such lumpsum agreeing with the total amount of schedule 'A' this schedule accompanying the lumpsum tender shall be written legibly and free from erasures, over writings, or conversations of figures, corrections where unavoidable should be made by crossing out initialing dating and rewriting.

11. Tenderers offering a percentage deduction from or increase on the estimate amount (except in the case of tender called for specifically under the percentage rate tender system) and those not submitted in proper form or in due time will be rejected. Rates or lumpsum amount for items not called for shall not be included in the tender No alteration which is made by the tenderer in the contract from, the conditions of contract the drawings, specifications or quantities

accompanying same will be recognized, and if any such alterations are made, the tender schedule.

12. The tenderer should workout his own rates, without reference being made to the public works department current schedule of rates or the public works department estimate which are not open for inspection by tenders. However, in case tenders called for under the percentage tender system the tenderer should work out his own rate but quote his percentage rate above or below, the total estimate cost of work of the departmental indicated in the tender schedule.

13. The price at which and the source from which certain particular materials shall be obtained by the contractor and given at the end of the schedule accompanying the tender form tenderers must accept the materials at these prices and shall quote their price for finished work accordingly. Notwithstanding any subsequent change in the market value, for those materials, the charge to the contractor will remain as originally entered in the written no centage or incidental charges will be borne by temple in connection with this supply.

14. The attention of the tenderers is directed to the contract requirements as to the time or beginning as to the time or beginning work, the rate or progress and the dates for the completion of the whole work and us several parts, the following rates of progress and proportionate value work done from time to time, as will be indicated by the Executive Engineers certificates of the value of work done will be required date of commencement of this programme will be the date on which the site (or premises) is handed over to the contractor.

Period after date of commencement	Percentage of work completed (Based on the contract lumsun amount)
6 Months	
I mile stone (1 months)	15%
II mile stone (2 months)	30%
III mile stone(3 months)	45%
IV mile stone(4 months)	60%
V mile stone(5 months)	75%
VI mile stone(6 months)	100%

15. No part of the contract shall be sublet without written permission of the Joint Commissioner/Executive Officer nor shall transfer be made by power of attorney authorising others to receive payment of the contractor's behalf.

16. If further necessary information is required the Joint Commissioner/Executive Officer of the Temple will furnish such but it must be clearly understood that must be received in orders, and according to instructions.

17. The Joint Commissioner/Executive Officer or other sanctioning authority has the right to reject any tender or all the tenders.

18. The tenderer who are themselves not professionally qualified shall undertake to employ the qualified technical men at their cost to look after the work. The tenders should state in clear terms whether they are professionally qualified or whether they undertake to employ technical men required by the department specified in the schedule below for the work. In case the selected tenderer is professionally qualified or whether they undertake to employ technical man required by the department specified in the schedule below for the work. In case the selected tenderer is professionally qualified or has undertaken to employ technical men under him, he should see that one of the technically qualified men should always be at site of the work during working hours personally checking all the items of works and paying extra attention to such works as may demand special attention e.g. reinforced concrete works etc.

Note (1) : Item (1) 2,3,4,5 should be scored-out in case where not applicable to the particular work.

Note (2): A penalty of Rs.2000/- p.m. for Diploma holder and for Rs.5000/- for degree holder, be levied in the case of default on the part of contractors in following the norms laid down above.

Note (3) : The employment of technical assistants would be based only on the value of contract, Engineers, with mechanical engineering qualification and retired from civil engineering departments are also suitable to supervise the civil engineering works because of their experience in civil engineering field.

Note(4) : In case the contractor who is professionally qualified and not in position to remain always at the site of the work and to pay extra attention to such as may demand special attention (e.g) RCC work etc., he should employ technical qualified men (as prescribed above).

Note (5) : It will not be incumbent on the part of the contractors to employ Technical Assistant / Assistants when the work is kept in abeyance due to valid reasons and if during such period in the opinion of the Executive Engineer the employment of Technical Assistant / Assistants is not required for the due fulfillment of the contract.

The schedule

Value of contract	
1. Above Rs.1,00,000/- and upto Rs.5.00 lakhs	1. One diploma holder in Civil Engineering (Or) 2. Not less than one retired junior engineer.
2. Above Rs.5.00 lakhs and upto Rs.10.00 lakhs	1. One B.E., (Civil) (or) 2. Equivalent Degree holder (or) 3. Not less than one retired sub Divisional officers AEE/ADE (or) One Diploma holder with three years experience.
3. Above Rs.10.00 lakhs and upto Rs.25.00 lakhs	1. One B.E., (Civil) with 3 years experience plus one Diploma holder in Civil Engineering. (or) 2. Equivalent Degree holder with 3 years experience plus one Diploma holder in Civil Engineering. (or) 3. Not less than one retired Sub-Divisional officer plus one diploma holder in Civil Engineering. (or) 4. Two Diploma Holder in Civil Engineering with 3 years and 5 years experience respectively.
4. Above Rs.25.00 lakhs and upto Rs.50.00 lakhs	1. One B.E., (Civil) with 3 years experience plus two Diploma holder in Civil Engineering. (or) 2. One B.E., (Civil) with 3 years experience plus two retired junior Engineering. (or) 3. Equivalent Degree holder with 3 years experience plus two Diploma holders in Civil Engineering / two retired junior engineers. (or) 4. One retired Sub Divisional Officer (AEE or ADE) plus two Diploma Holders in Civil Engineering. 5. (or) One retired Sub Divisional Officer (AEE or ADE) plus two retired Junior Engineers.
5. Above Rs. 50.00 lakhs contractor In addition to the Technical personal proposed for values above Rs.25.00 lakhs and upto three years experience shall be employed.	To be examined in individual cases depending on the nature or work and the technical skill involved and to be defined at appropriate me.

19. The contractor should offer employment to ex-toddy tappers as per as possible. The number of ex-toddy tappers to whom he can so offer employment should be mentioned in the tender and the should under take in the agreement to offer such employment to such number.

20. The contractor shall employ with the provisions of the Apprentices Act 1961 and the rules and orders issued there under from time to time. If he fails to do so, this failure will be breach of the contract and the competent authority, may at his discretion, cancel the contract or invoke any of the penalties for breach of contract provided in the conditions of contract. The contractor shall also penalties for the breach of contract provided in the conditions of contract. The contractor shall also be liable for any pecundary liability arising on account of any violation by him of the provisions of the Act contractor shall during the currency of the contract ensure engagement to the apprentices is in the categories mentioned below who may be assigned to him by the Director of Employment and Training/State apprenticeship Advisor Tamilnadu, The Contractor shall train them as required under the apprentices Act 1961, and the rules made there under and shall be responsible for, all obligations of the employer under the said act including the liability to make payments to the apprentice as required under the said Act.

Value of contract	Category	No. to be appointed
Rs. 1 lakh and upto Rs. 3 Lakhs	❖ Building constructor	1
	❖ Brick layer	1
Above Rs. 3 Lakhs and upto Rs. 10 lakhs	❖ Building constructor	1
	❖ Brick layer	1
Above Rs. 10 Lakhs and upto Rs. 50 lakhs	1. Building constructor	1
	2. Brick layer	1
	3. B.E., (Civil) or Equivalent	1
	Degree holder	

Unless the contractor has been exempted from engagement of apprentices by the director of employment and training / state apprenticeship advisor a certificate to the effect that the contractor had discharged his obligation under the said Act. “Satisfactory” should be obtained from the Director of employment and Training / state apprenticeship adviser and the same should be produced by the contractor for final payment in the settlement of the contract.

21. The contractor should employ one I.T.I. trained mason for every ten masons of part there of in case of non – availability of ITI trained masons, the contractor should obtain the prior approval of the Executive Engineer concerned, before proceeding with the contract with other kind of masons.

22. The contractor shall be solely responsible for the payments of Sales Tax under the provisions of the Madras Contral Rules tax Act 1939 (Madras Act II of 1939) an inforce for various items of work time being and the rates for the various items of work shall remain unaffected by any changes that may be made from to time to time in the rate at which such tax is payable. Sales tax and the materials supplied to the contractor as amended from time to time shall be paid by them separately and the relevant challans produced to the departmental officers.

23. Statement given brief particulars of equipment and resources that will be put at disposal of the work under the following classifications should accompany the tender.

23.a. 1. Lorries

2. Concrete Mixers

3. Needle Vibrator

4. Mechanical spray set for curing

5. Building host

6. Centering materials or very good quality

7. a. Column moulds atleast 50% of column sizes provided in plain

b. Organisation (i) Technical (ii) unskilled

c. Resources in materials like teakwood etc., and extent upto which departmental help required for procurement of materials and transport of same.

24. The Joint Commissioner/Executive Officer, reserves to himself the right of allotting the different sub-works to the different contractors or to one and the same contractor as the may decide after the receipt of tender.

25. Additional security to be furnished for the lesser rates

On evaluation of tender, if it is found that if the overall quoted amount of the tender is less than 5 to 15% of the value put to tender, the contractor shall pay an additional security at 2% of the estimated value. If the tender discount exceeds 15% to 20% the contractor shall pay an additional security deposit of 50% of the difference between the quoted amount and estimate amount. Failure to furnish the additional security deposit within 15days from the date of receipt of acceptance order and execute the agreement shall entail cancellation of award contractor and forfeiture of EMD furnished.

26. In case of contractor for construction of buildings either permanent of semi-permanent buildings, a sum of equivalent to 2½ % of the value work done will be retained from the Government for a period of one year reckoned from the date of completion of the work in order to enable to departmental officers to watch the effect of all seasons on the work done by the contractor. The amount so far retained with the Government will be returned only on the expiry of one year period referred to above and on execution of indemnity bonds by the contractor for a further period of four years. The contractor shall be liable to set right all defects arising our his faulty execution or sub-standard work noticed during the above five years period at his cost.

27. The contractor is bound by all the conditions of the clauses of the general conditions of contract amended from time to time.

SPECIAL CONDITIONS
(Accompanying Tender Notice.)

1. Postal Tender:

- 1.1. The contractors may have the option to present the tender directly or to send it by registered post, acknowledgement due, on or before the last date for receipt of tenders.
- 1.2. In case of sending tenders by registered post, acknowledgement due, it is the responsibility of the tenderer himself to dispatch the tender sufficiently early, so as to reach the tender opening authority before the date and time notified in the tender notice for opening of tenders.
- 1.3. No representation or appeal of any kind will be allowed against belated Receipt of tenders by post beyond the notified date and time or in transit etc.

SCHEDULE – A
Schedule of rates and approximate quantities

1. The quantities here given are those upon which the lumpsum tender cost of the work is based but they are subject to alterations, omissions, deductions or additions as provided for in the conditions of this contract and do not necessarily show the actual quantities of work to be done. The unit rates noted below are the governing payment for extra or deductions for omissions according to the conditions of the contract as set forth in the general conditions of contract of TNBP and other condition conditions (or) specifications of this contract.

2. it is to be expressly understood that the measured work is to be taken that (Not withstanding any custom or practice to the contrary according to the actual quantities when in place and finished according to the drawings or as may be ordered from time to time by the Executive Engineer and cost calculated by measurement or weight at the respective prices, without any additional charge for any necessary and contingent works connected therewith. The rates quoted are for works in site and complete in every respect.

Item No.	Probable qty (Figures)	Description of work	TNBP No	Rate (Words & Figures)	Unit(in words)	Amount (figures) Rs. P
		Vide separate schedule attached				

Signature of Contractor : (Vide separate sheet attached)

Issued to

.....on.....

.....

.....

.....

EXTRACT OF AMENDMENT

Amendment to clause 69.1 of General Conditions, contract based on orders in G.O.Ms.No.1152/PW/DT.19.6.80.

MODIFICATION AND AMENDED IN G.O.Ms.No.

Cause – 69-1 – of General conditions of contract :

In case of any dispute or difference between the parties to the contract either during the progress or after the completion of the works or after determination, abandonment or breach of the contract or as to any other matter or thing arising there under except as the matters left to the sole discretion of the Joint Commissioner/Executive Officer under clause 18,20,25-3-27-1, 34, 35 and 37 of General conditions of contract or as to the withholding by the Joint Commissioner/Joint Commissioner/Executive Officer of the payment of any bill to which the contractor may claim to be entitled, the either party shall forth with give to the other notice or such of difference and dispute or difference shall be and is hereby referred to the arbitration of the Joint Commissioner/Executive Officer of the nominated temple mentioned in the articles of agreement (herein after called the Arbitrator) in cases where the value of claim is less than or upto Rs.50,000/-.

In case where the value of claim is more than Rs.50,000/- the parties will seek remedy through the competent civil court.

SPECIAL CONDITION FOR ERRADICATION OF CHILD LABOUR

G.O.(MS) No.53 Labour and Employment (V II) Department/Dated 12.5.03

The work contract assigned to the Contractor's shall be cancelled if they engage Child Labour in executing works and such Contractors should be, black listed for three years.

PART –IV
SPECIAL CONDITIONS

1. Clean fresh water and river sand shall be used in all class
2. Only clean fresh water shall be used on the work. The contractor shall make his own arrangements for water and shall meet all charges therefore the special attention of the contractor is drawn to clause 36 General conditions of contract regarding water and lighting.
3. The broken stone for concrete and RCC works should be graded and passed by the Executive Engineer.
4. All iron work or steel work of every kind except steel rods that are to be embedded in cement concrete shall immediately arrive at the site and properly scrapped and wire brushed and given a printing coat of approved lead pointing without claiming extra.

5. HOLDFASTS :

Iron holdfasts shall be fixed in the walls using cement mortar 1:3 for that portion of fixing at the time of construction of walls. It should be mixed with cement concrete 1:3:6 using 20mm gauge broken granite stone jelly for proper anchored and binding. No separate rate for such pockets of concrete filling at holdfast points and for using C.M. 1:3 for that portion, will be allowed and this will be measured as masonry along with adjacent masonry.

6. WOOD :

Teakwood shall be best Indian Teakwood only and shall be subject to inspection and approval by the Executive Engineer before use on the work. Country wood where specified shall be Karumarudu, Pillamarudu, Kongu, Veteak for scantling and Manja Kadambu, Aiyini for planks as may be specified and approved by the Executive Engineer.

7. Holes and charges of electric wiring, water supply and drainage etc., shall be provided as directed during progress of work without any claiming extra.
8. The work will be carried out with the least hindrance to the adjoining building and offices and the contractor will be responsible for any damages, caused to the existing fixtures electric fittings etc., in the course of execution and the contractors shall make good of damage without claiming extra.

9. T. BEAMS :

In the of 'T' Beams and ELL beams the quantity given in the schedule is the quantity of the rib portion only. The top flange portion will be always measured with the general slab portion and paid for at the slab portion only. For all RCC works the rate shall include the treatment of bearing as per specification No. 30 of TNBP.

10. CONCRETE WORKS :

All exposed concrete surface will be required to be finished by cement plaster as per specification No. 30E (a) of TNBP.

11. PLASTERING CONCRETE :

All corners shall be finished sharp using C.M. 13 not exceeding 3 inch width on each side of the corner. So also the edges of beams of door and windows opening soffits, shall be finished sharp using rich mortar and finished truly vertical or horizontal as the case may be. The unit rate quoted by the contractor for plastering shall be inclusive of the cost of finishing as above and so separate claim for extra rate will not be entertained. However, the cement utilized for the work will be taken into consideration in the adequacy statement for issued of departmental cement to the contractor.

12. WORKS IN DIFFERENT FLOORS:

If separate rate is not called for, for execution of similar items of work in different floors, then, single rate quoted will alone be entertained uniformly for execution of such items of works in different floors. No claim for extra rate will be entertained under and circumstances.

13. The Joint Commissioner/Executive Officer reserves the right to split up the work and entrust the main work, internal water supply and sanitary arrangements to different contractors.

14. The protection if any to the masonry will be measured under the relevant items and no extra will be paid for finishing the same.

15. Payments for centering works for all RCC items shall be made only after the concrete is laid, even though separate rate is called for, for centering works in the schedule.

16. Concrete For R.C.C. works

All cement concrete for RCC works shall be machine mixed and vibrated.

Additional specifications :

1. The arrangements of M.S. Rods for reinforcement for such RCC works shall be in accordance with departmental drawing supplied.
2. The planks for forms and centering for RCC works shall be of well seasoned timber approved by the Executive Engineer according to clause 8 of TNBP 30. They must be made smooth and even perfectly level to top so as to give smooth and even finish to the RCC ceilings alternatively the contractor should use steel sheets over wooden forms centering and form work shall be provided to the extent and as ordered by the Executive Engineer during the execution
3. All time mortar shall be ground mixed in mortar and will be as per T.N.B.P.

4. M.S. steel rods should be cut and placed as reinforcement with proper care according to the available rods at site so as to ensure the minimum possible wastage.
5. Ordinary the contractor shall be responsible for the collection of all materials required for the work.
6. The required G.I. Pipes if available will be supplied free of cost of site of work. The Scurplus G.I. Pipes if any will be returned in good condition to the department failing which double the cost at market rate plus centage charges will be recovered form the contractor.
7. Construction Materials;

Supplemental to clause of any 20 of General conditions.

7.1 Cement :

The contractor has to make his own arrangements for the procurement of cement to required specification for the works subject to the followings.

- a. The contractor shall procure cement required for the works only from reputed cement factories (Main producer or their authorized agents, manufacturing cement at I.S.I. standard) acceptable to the Engineer-in-charge. The contractor shall be required to furnish to the engineer – in- charge bills of payment and test certificates issued by the manufactures or their authorized agents to auth-enticate procurement of quality cement from the approved cement factory. The contractor shall make his own arrangements for safe haulage and adequate storage of cement.
- b. The contractor shall procure in standard packing of 50 kg per bag from the authorized manufactures. The contractor shall make necessary arrangements at his own cost to the satisfaction of Engineer-in-charge for actual wightment of random sample from the available stock and shall conform with the specification laid down by the Indian standards institution or other standard foreign in situation as the case may be cement shall be got tested for all the tests as directed by the Engineer-in-charge atleast one month on advance before the use of cement bags brought and kept on site godown.
- c. The employer will furnish air retraining agents and admixtures required to the contractor free of cost at the employer stores. The use of such admixtures and agents shall be made as per the instructions of the Engineer-in-charge. The cost of cartage / storage handling batching mixing shall be borne by the tendered for concrete.
- d. The contractor should store the cement of 60 days requirement atleast one in advance to ensure the quality of cement brought to site and shall not remove the same without the written permission of engineer-in-charge.

- e. The contractor shall forth with remove from the works area and cement that the Engineer-in-charge may disallow for use on account of failure to met with required quality and standard.
- f. The contractor will have to construct sheds for storing cement having capacity not less than the cement required for 90 days use at approved locations. The Engineer-in-Charge of the representative shall have free access to such store at all times.
- g. The contractor shall further at all times satisfy the Engineer-in-charge on demand by production of records and test books or by submission of returns and other proofs as directed that the cement is being used as tested and approved by Engineer-in-charge for the purpose and the contractor shall at all times, keeps his record upto so as to enable the Engineer-in-Charge to apply such checks as the may desire.
- h. Cement which has been unduly long in storage with the contractor or alternatively has deteriorated due to inadequate storage and thus become until for use on the works will be rejected by the Department and no claim will be entertained. The contractor shall forth with remove from the work area any cement the Engineer-in-charge may disallow for use of work and replace by cement complying with the relevant Indian standards.

7.2 Steel

The contractor shall provide mild steel (MS) reinforcement basis, High yield strength deformed (HYSD bars, rods and structural steel etc., required for the works only from the main and secondary producers manufacturing steel or other authorized agents to the prescribed specifications Bureau of Indian standards requirements and licensed to affix I.S.I. test certificate issued by the Govt. approved laboratory certification marks and acceptable to the Engineer – in – Charges, necessary I.S.I. test certificate are to be produced to Engineer-in-charge before use on works.

The diameters and weight of steel should be as follows:

S. No.	Diameter of rod		Sectional weight in kg per running metres both for plan & HYSD steel
1.	6	Millimeters	0.22
2.	8	Millimeters	0.39
3.	10	Millimeters	0.62
4.	12	Millimeters	0.89
5.	14	Millimeters	1.21
6.	16	Millimeters	1.58
7.	18	Millimeters	2.00

8.	20	Millimeters	2.47
9.	22	Millimeters	2.98
10.	25	Millimeters	3.85
11.	28	Millimeters	4.83
12.	32	Millimeters	6.31
13.	36	Millimeters	7.99
14.	40	Millimeters	9.86

Note if any rods other those specified above are used the weight shall be as per standard steel tables.

Act NO. 15 of 1999, Tamil nadu General Sales Tax (Fifth Amendment)

In let further to amend the Tamil Nadu General Sales Tax, Act 1959

1. (1) This Act may be called the Tamilnadu General Sales Tax (Fifth Amendment) Act 1999.

(2) It shall come into force on such date as the State Government may by notification, appoint.

2. After section 7-F of the Tamil Nadu General Sales Tax Act 1959, the following section shall be inserted namely.

7-F Deduction of tax at source in works contract (1) not with standing anything contained in this Act, every person responsible for playing any sum to any dealer for execution of works contract shall at the time of the payment of such sum, deduct an amount calculated at the following rate, namely

(i) Civil Works Contract – Two percent of the total amount payable to such dealer

(ii) All other works contract – Four percent of the total amount payable to such dealers.

Provided that no deduction under sub-section (1) shall be made where.

- a. no transfer of property in goods (whether as goods or in some other form) is involved in the execution of such works contractor.
- b. The dealer produces a certificate from the assessing authority concerned that the he has no liability to pay or has paid the tax under section 3-B or section 7-C, or
- c. Declared goods are purchased from a registered dealer dealer within the state and of works contract in the same form in which such goods were purchased.

Provided further that no such deduction shall be made under this section where the amount or the aggregate of the amount paid or credited or likely to be paid or credited, or likely to be paid or credited, during the year by such person to the dealer for execution of the works contract including civil works contract does not or is not likely to exceed one lakh rupees.

Explanation, for the purpose of this section

(i) the term person shall include

- (a) the central or a state government
 - (b) a local authority
 - (c) a corporation or body established by or under a central or state Act,
 - (d) a company incorporation under the companies Act. 1956 (Central Act 1 of 1956),
including a central or state government undertaking.
 - (e) a society including a Co-operative society
 - (f) an educational institution (or)
 - (g) a trust
- (ii) the term “Civil Works Contract” shall have the same meaning as in the Explanation to section 7-c.
1. Any person making such deduction shall deposit the sum so deducted to such authority in such manner and within such time, as may be prescribed.
 2. Any person who makes the deduction and deposit, shall within fifteen days of such deposit issue to the said dealer a certificate in the prescribed form for each deduction, separately and send a copy of the certificate of deduction to the assessing authority, having jurisdiction over the said dealer together with such documents, as may be prescribed.
 3. On furnishing a certificate of deduction referred to in sub-section (3) the amount deposited under sub-section (2), shall be adjusted by the assessing authority towards tax liability of the dealer under section 3-B or section 7-c, as the case may and shall constitute a good and sufficient discharge of the liability of the person making deduction to the extent of the amount deposited.
 4. Any person who contravenes the provisions of sub-section (1) or subsection (2) shall pay in addition to the amount required to be deducted and deposited interest at two percent per month of such amount for the entire period of default.
 5. Where the dealer proves to the satisfaction of the assessing authority that he is not liable to pay tax under section 3-B or section 7-C the assessing authority shall refund the amount deposited under sub-section (2) after adjusting the arrears of tax if any due from the dealer in such manner as may be prescribed.
 6. The tax or interest under this section shall become due without any notice of demand on the date of actual for the payment by the person as provided under sub-sections (1) and (2).

(By order of the Governor)

ADDITIONAL CONDITIONS - II OF CONTRACT

Goods and Service Tax (GST) on Government Works Contract (Clause – 119 of Central Goods & Service ACT (CGST), 2017:-

1.The Central Government vide Notification No.24/2017- Integrated Tax (Rate), dated 21.09.2017 has amended the GST rate on Government, Contracts to 12 Percent, as described below. This rate would be applicable for ongoing as well new contracts “Service provided to the Central Government, State Government, Union Territory, a local authority or a Government authority by way of construction, erection, commissioning, installation, completion, fitting out, repair, maintenance, renovation, or alternation of “

- ❖ A civil structure or any other original works meant predominantly for use other than for commerce, industry, or any other business or profession;
- ❖ A structure meant predominantly for use as
 - An educational.
 - A Clinical, or
 - An art or cultural establishment; or
- ❖ A residential complex predominantly meant for self-use or the use of their employees or other persons specified in Paragraph 3 of the Schedule III of the Central Goods and Services Tax Act, 2017.

2.Government of India has notified vide Notification No.20/2017- Central Tax (Rate), dated 22nd August, 2017 and Notification No.24/2017 – Central Tax (Rate), dated 21st September 2017, the concessional rate of the Goods and Services Tax (GST) at 12% [CGST at 6% & SGST at 6%] is leviable for any Government Contract, whether Civil or Electrical, Irrespective of the Goods and Services Tax (GST) rate applicable on purchase of goods used in the execution of Government Contract.

And the GST amount will be calculated at 12% from the sum of total tendered value quoted by the tenderer for construction cost (excluding GST) specified in the BOQ, Subject to GST rate applicable from time to time as recommended by the GST Council.

3.All duties, taxes, and other levies except GST, payable by the contractor under the contract, or for any other cause shall be included in the rates, prices and total Bid Price submitted by the Bidder.

a.As per Notification No.31/2017 – Central Tax (Rate) dated 13th October, 2017 the concessional rate of GST at 12% [CGST at 6% + SGST at 6%] is leviable for any Government contract, whether Civil or Electrical, irrespective of the GST rate applicable on purchase of goods used in the execution of Government Contract. The Contractor is eligible to get refund of excess tax paid over or liable to pay tax as per Notification No.20/2017, Central Tax (Rate) dated 21.09.2017 and Notification No.31/2017, Central Tax (Rate), dated 13.10.2017.

b.Further, for works Contract services involving predominantly earth works (that is, constituting more than 75% of the value of the works contract) supplied to Central Government, State Governments, Local Authority, Governmental Authority for Government Entity shall be taxed at 5% as per Notification No.31/2017 – Central Tax (rate) dated 13th October, 2017. Therefore, for such contract the amount of GST is to be calculated at 5% [CGST at 2.5% + SGST at 2.5%] over and above the Basic Rate.

4.INPUT TAX CREDIT (ITC) :-

- a) As per Notification 202, dated 20.06.2017 and as per sub-section (2) of Section 7 OF THE Tamil Nadu Goods and Services Act, 2017, (Tamil Nadu Act 19 of 2017), activities or transactions undertaken by State Government shall be treated neither as supply of goods nor a supply of service
- b) As per Chapter IX (Section 41) of the Tamil Nadu Goods and Services Act, 2017, every registered persons may be entitled to take the credit of eligible input tax, as self-assessed, in his return and such amount shall be credited on a provisional basis to his electronic credit ledger.
- c) As per PWD Revised SOR (2017-18), dated 21.10.2017, under General Note, 8 (ix), the Contractor is eligible to get refund of excess tax paid over or liable to pay tax for this Contract Work.

5. In addition to the Security Deposit, retention amount shall be deducted from the running account bills, a sum equivalent to 5% (Five Percent) of the total value (including the Goods and Service Tax (GST) Amount for all the running account bill) of each bill as retention money.

6.Out of the above 5% retention amount, 2^{1/2}% of (Two and Half Percent) of the total value of the work so far executed will be released to the contractor on payment of final bill, and in the final bill, the Goods and Services Tax (GST) amount retained In previous payment has to be released to the contractor without interest.

7.The balance 2^{1/2}% will be retained for a period of 1 year reckoned from the date of completion of the work, as all defects shall have been made good according to the true intent and meaning hereof, whichever shall happen last.

8.The retention money of 2^{1/2}% including GST (Two and a Half Percent) of the total value of contract after deducting any amount due to the Department, shall be refunded to the Bidder without interest after the defects liabilities attached to the contract is over.

9.a.Part or complete payment will be made only in satisfactory completion of work in full / part thereof and value of work executed shall be determined, based on the measurements and check measurements by the Engineer in the Measurement Book.

b.For every Bill, 12% of GST will be paid to the Contractor based on the value of work done for Construction by the Employer. After the payment including 12% of GST, the Contractor should pay the GST Amount to Government through his GST Registration No. Also the contractor needs to submit the Material purchase bill mentioning the name of the work/s in the package and GST No. to the Employer.

c. FIRST BILL PAYMENT :-

At the time of payment for first running account bill, the contractor should produce the GST paid details on goods (materials) to the Employer for ITC.

d. INTERMEDIATE BILL PAYMENT :-

At the time of payment for next running account bills, the contractor should produce the GST paid details of services upto previous bill payment (i.e. GST paid detail for the previous work bill) along Input Tax Credit (ITC) availed at the time of payment of intermediate bill to the employer.

e. FINAL BILL PAYMENT:-

The Contractor should produce the GST paid details for all the materials used for construction work, and GST paid details of services for the upto previous payment (ie., GST paid detail for the upto previous work bill) to the Employer along with Input Tax Credit (ITC) availed at the time of payment of final bill to the employer.

f. SUBMISSION OF GST PAID DETAILS OF FINAL BILL:-

The GST paid details for the final work bill payment of construction work to be submitted by the contractor to the employer in few days after getting payment.

10.It is to be expressly understood that the measured work is to be taken net (Not withstanding any custom or practice to the contrary) according to the actual quantities. When in places and finished according to the drawings, or as may be ordered from time to time by the Collector and the cost calculated by measurement or weight at the respective prices, without any additional charge for any necessary or contingent works concerned therewith. The rates quoted excluding GST Amount are for the finished works in situ and complete in every respect.

Tender Accepted with Violent Excess or Unworkable Rates:

The tender is accepted with excess rates (+) 15% and above for certain items, the quantity of work under such items should not exceed on any account during execution. On the same analogy, it should be ensured that the quantity for items of work with unworkable and low rates i.e. less than 10% of the estimates rates, are not reduced during execution.

ADDITIONAL CONDITIONS : 1

1. The contractor be responsible for the safe custody and storage of materials under any conditions of the places where the works are approved by the Executive Engineer.
2. No royalty shall be charged where due for materials, quarried from the public works department of district board of their government quarries, assistance as necessary will be given to the contract by the P.W.D., to obtain access to quarries approved by Executive Engineer. No plot rent shall be charged for materials stocked in the Government land during the course of construction provided such materials are removed within the month-after the works is completed.
3. Royalty (or) charges due for use of private quarries and private and shall be paid by the contractor.
4. The contractor shall form his own approach road to the works site for which no extra will be due to him. On completion of work, the contractor shall not be permitted to remove the materials, laid for formation of road if the contractor, is allowed to used the existing road he shall maintain them in good condition at his own cost, throughout the period of the contract.
5. Any surplus materials remaining at the site will not be generally taken over by the department whether before or after the completion or determination of contract. Such materials either which were originally produced by the contractor (or) were issued to them by the department and charged to their accounts are the property of the contractors and can however be taken over by the department if required for use on other which are in progress only the special arrangements and at the prevailing market rates viz., the rates at which the article or articles of a similar description can be procured at a given time from public market.

If the materials were originally used by the departments the price allowed to the contractor on requisition shall not exceed the amount charged to the contractor excluding the cost of storage charges if any.

6. The surplus materials which were originally issued to the contractor by the department for use in the work shall not be removed from the site of work without getting the written permission of the Executive Engineer.
7. The contractor's special attention is invited to clause 35,36 and 37 if TNBP and he is requested to provide at his own expense sheds, latrines and urinals for his workers.
8. If night works is required to fulfill the agreed rates of progress all arrangements shall be made by the contractors inclusive of lighting without any claim for extra rates.
9. The contractor shall not employ the labour below the age of 12 years and shall also note that he must offer employment to Ex-servicemen extoddy tappers and unemployed agricultural labourers as far as possible.
10. Any of the item in the schedule may be omitted or radically altered. No variation in rate shall become payable to contractor on account of such omissions (or) variation in quantities.

11. References to TNBP in the schedule of quantities referred to printed. 1985 and 1988 and addenda and corrigenda issued thereafter.
12. The construction of building will be deemed to be completed only if any items of works including finishing items of works contemplated therein are executed.
13. The contractor shall abide the contractor's labour regulation or the P.W., Framed by the Tamilnadu Government.
- 13.a.All the contractors and sub-Contractors hired by main contractors shall engage construction workers registered with the construction Workers welfare board as required under the building and other construction works (Regulation of employment and condition of service) Act 1996 (Central Act 27 of 1996)
14. In respect of all contract with contract value exceeding Rs.5,000/- income tax 2% of the gross of amount irrespective of the bill amount payable to the contractor will be recovered at source.
15. the sales tax clearance certificate should be furnished before the finalization of contract.

16.(a). E.M.D:

The acceptance of E.M.D. in Demand Draft issued by Nationalized or Schedule bank drawn in favor of The Joint Commissioner/ Executive Officer, Arulmigu Dhandayuthapani Swamy Temple, Palani.

(b) Security deposit:

In case of contractors for building works the security deposit (i.e.2%) of the value of contract **including GST amount** minus the E.M.D. already remitted is to be produced in the shape of Demand Draft to Joint Commissioner/ Executive Officer, concerned before signing the agreement.

17. Risk Insurance :

The work executed by the contractor under these contract shall be maintained at the contractors risk, until the work is taken over by the Executive Engineer. The Temple shall not be liable to pay for any loss or damages occasioned by or arising out of fire, flood, volcanic eruption, earth quake, other convulsion of nature calamities, risks arising out of acts of God during such period and that the option whether to take insurance coverage or not to cover such risks is left to the contractor.

18. Standard specifications:

For detailed description of various items of works to be executed in addition to the brief description given in the schedule A and for the rights and obligations of the contractors etc., the attention of the contractors is invited to Tamilnadu building practice which should be followed in all respect both in latter and spirit. The materials used, the workmanship, the mode of execution of the work etc., should confirm the relevant specification on TNBNP.

19. Safety code:

The safety measures and all amenities for the labours shall be made by the contractor at his cost as indicated in the safety code vide appendix to general conditions to contract and clause 34,35 and 42-1 to 42-7 of general conditions of contract.

WITH HELD AMOUNT:

The withheld amount at 5% be recovered from each bill based on the value of workdone.

Retention of 2 ½% for one year:

In case of contracts for construction of buildings either permanent (or) semi-permanent buildings a sum equivalent to 2 ½% of the value of work done will be retained with the Government for a period of one years reckoned from the date of completion of the work done by the contractor. The amount so retained with the Temple will be refunded only on expiry of one year period referred to above and on execution of indemnity bond by the contractor for a further period of four years.

The contractor shall be liable to set right all defects arising out of his faulty execution (or) sub-standard work noticed during the above five years period at his cost.

In addition to the aforesaid security deposit, retention amount shall be deducted from the running account bills, a sum equivalent to 5% (Five percent) of the total value (including the Goods and Service Tax (GST) Amount for all the running account bill) of each bill as retention money out of the 5% rentention amount, 2 ½ % (Two and half Percent) of the total value of the work so far executed will be released to the contractor on payment of final bill, and in the final bill, the Goods and Services Tax (GST) amount retained in previous payment has to be released to the contractor without interest.

And the balance 2 ½ % will be retained for a period of one year reckoned from the date of completion of the work, as all defects shall have been made good according to the true intent and meaning hereof, whichever shall happen last.

The retention money of 2 ½ % including GST (Two and a Half Percent) of the total value of contract after deducting any amount due to the Department, shall be refunded to the Bidder without interest after the defects liabilities attached to the contract is over.

20. Recovery of dues under revenue recovery act:

Any amount fallen due from the contractor on account of this contract even after recovering from the bills for this work and any other contract awarded to the contractor than the amount is liable to be recovered under the provision of Revenue Recovery Act.

Additional condition of contract : 1

1. The contractor shall at his own expense provide arrangement for the provision of footwear for any labour doing cement mixing work and all other similar type of work involving the use of tar mortar etc, to the satisfaction of the engineer incharge and on his failure to do so Temple. shall be entitled to provide same and recover the cost from the contractor.

2. when there are complaints of non payment of wages to the labour bills of the contractor may be with – held pending a clearance certificate from the labour department.

ADDITIONAL CONDITIONS. III

Rules for the provision of Health and Sanitary arrangements for workers employed by the P.W.D., and their contractors.

The contractor's special attention is invited to relevant clauses of general conditions of contract in the TNBP and he is requested to provide at his own expense the following amenities to the satisfaction of the Executive Engineer.

1. First Aid :

At the work site, there shall be maintained in a readily accessible place, first aid appliances and medicines including supply of sterilised dressings and sterilized cotton wool. The appliance shall be keep in a good order. They shall be placed under the charge of responsible person who shall be readily available during working hours.

2. Drinking water:

1.

- a. water of good quality fit for drinking purpose shall be provided for the workpeople on scale not less than fifteen litres per head per day.
- b. Where drinking water is obtained from an intermitant public water supply system each work place shall be provided with storage tank where such drinking water shall be stored.
- c. Every water supply and storage shall be at a distance of not less than 15m from any latrine drain or sources of pollution where water is to be drawn which is within such proximity of latrine drain or any other source of pollution the well shall be property chlorinated before water is drawn from it for drinking. All such wells shall be entirely closed in and be provided with a trap door which shall be dust and water proof.

2. A reliable pump shall be fitted to each covered well, the trap door shall on kept looked and opened only for cleaning or inspection which shall be done atleast once in a month.

3. Washing and bathing places

Adequate washing and bathing places shall be provided separately for men and women, such bathing place shall be kept in clean and drained condition bathing (or) washing should not be allowed in or near any drinking well.

4. Latrines and urinals

They shall be provided within premises of every work place latrines and urinals in an accessible place and the accommodations separately for each of them shall be on following scale or on the scale as directed by Executive Engineer in any particulars use.

1. Where the No., of persons employed does not exceed 50-2 seats
2. Where the No. of persons employed excess 50 but does not exceed 100-3 seats.
3. For every additional 100 persons- 3 seats. If women are employed separate latrines and urinals screened from these for Men shall be provided on the same scale. Except in work place provided with water flush out latrines connected with a water borne sewage system all latrines shall be provided with receptable on dry earth system which shall be cleaned atleast four times daily and atleast twice during working hours and kept in strictly sanitay condition. The receptables shall be tarred inside and outside atleast once a year.

The escreta from the latrines shall be disposed off at the contractors expenses in outway pipe approved by the local public health authority. The contractor shall also employ adequate No., of scavengers and conveyancy staff to keep the latrines and urinals in a clean conditions.

5. Shelters during rest

At every work site there shall be provided free of cost two suitable sheds one for meals and other for rest separately for men and women for the use of labourers.

6. Creches :

At every work place at which 50 or more women ordinary employed there shall be provided two huts of suitable site for the use of children under the age of 6 years, belonging to such women one hut shall be used for infants games and play and the other as their bed room. The huts shall not be constructed on a lower standard than the following.

1. thatched rooms
2. mud floors and walls
3. plants spread over the mud floor and covered with meeting.

The site of the crèches should vary according to the No. of women workers. The creches should be properly maintained and necessary equipment like toys etc., shall be provided huts shall be provided with suitable and sufficient sweepers to keep the place clean.

There shall be Aayas in readiness, Sanitary urinals shall be provided to the satisfaction of the health officer of the are concerned.

The No of huts shall be restricted to children their attendants and mothers of the children.

7. Canteen:

Cooked food canteen on a moderate scale shall be provided for the benefits for the workers as it is considered expedient.

8. Sheds for workmen

The contractor should provide at his own expense ahead for housing the workmen. The sheds shall be on standard not less than the cheaper shelter type to live in which the work people pertaining in the locality are accustomed to. A floor area of 1.80 mx1.30m for two persons shall be provided. The sheds to be in rows with 1.3 m a clear space between sheds and 9m clear space between rows if condition permit. The work people camp shall be laid out in units of 400 persons each unit to have a clear space of 12m around.

Additional condition: IV

Safety provision in the building industry condition in addition to clause 42 of preliminary specification T.N.B.P.

Article-1:

PART -1

1. suitable scaffolds shall be provided for workmen for all work that cannot be safely done from ladder or by other means.
2. A Scaffold shall not be constructed taken down or substantially altered except.
 - a. under the supervision of the competent and responsible persons and
 - b. By as far as possible competent workers possessing adequate experience in such kind of work.
4. Scaffolds shall be so constructed that no part thereof can be displaced in consequence of normal use.
5. Scaffolds shall not be overloaded one as far as practicable the load shall be evenly distributed. Before installing lifting gear or scaffolds, special precaution shall be taken to ensure the strength and stability of the scaffolds.
6. scaffolds shall be periodically inspected by a competent persons.
7. Before allowing a scaffold to be used by the workmen every employer shall ensure whether the scaffold has been erected by his workmen or not take steps to ensure that it functions fully with the requirements of this articles.

Article -2.

1. Working platforms gangways and stairways shall be so constructed that part thereof can save unduly (or) unequally.
2. To be so constructed and maintained to obviate from risks of persons tripling or slipping and to be kept free from any un-necessary obstructions.
3. Every working platform gangway working place and staircase shall be suitably tested.

Article -3.

1. Every opening in the floor of a building or on a working platform shall except for the time and to extent required to allow the access of persons or the transport or shifting of materials be provided with suitable means to prevent the fall of persons or materials.
2. When persons are employed on a roof there is danger of falling from height exceeding than to be prescribed by national laws of regulations suitable precaution shall be taken to prevent the fall of persons or materials.
3. Suitable precautions shall be taken to prevent persons being struck by articles which might fall from scaffolds or other working places.

Article -4:

1. Safe means of access shall be provided to all at working platforms and other working places.
2. Every ladder shall be securely fixed and of such length as to provide secure hand – hold and foot hold at every position which it is used.
3. Every place where work is carried out and the means of approach there to shall be adequately lighted.
4. Adequate precautions shall be taken to prevent danger from electrical equipment.
5. No matter is on the site shall be constructed or placed as to cause danger to any persons.

Article -5 (General rules as to hoisting appliance : Article :3)

1. Hoisting machines and tackle including their attachments encharges and supports shall
 - a. Be of good mechanical constructions sound materials and adequate strength and free from patent defect and to be kept in good working order.
 - b. Every rope used in hoisting or lowering materials on as a means of suspension shall be suitable quality and adequate strength and free from patent defect.

Article -6:

1. Hoisting machines and tackle shall be examined and adequately tested after erection on the site and before use and re-examined in position at intervals to be prescribed by national law of regulations.
2. Every chain ring, hook shackle level and pulley block used in hoisting or lowering materials or as a means of suspension shall be periodically examined.

Article -7:

1. Every crane driver or hoisting appliances operator shall be properly qualified and
2. No persons under the age of 21 years shall be in control of any hoisting machine including any scaffold which or give signals to the operator.

Article -8:

1. In the case of every hoisting machine and of every chaining hood shackle, level and pulley block used in hoisting or lowering or as a means of suspension the safe working load shall be ascertained by adequate means.
2. Every hoisting machine and all gear referred to above shall be plainly marked with the safe working load. In the case of hoisting machine having a variable safe working load each safe working load and the conditions under which it is applicable shall be clearly indicated.
3. No part of any hoisting machines of any gear referred to above in this paragraph shall be loaded beyond the safe working load except for the purpose of testing.

Article -9:

1. Motor gear, transmission electric, wiring and other dangerous part of hoisting appliance shall be provided with efficient safe guards.
2. Hoisting appliances shall be provided with such mean as will request to a minimum the risk of the accidental descent of the
3. Adequate precautions shall be taken to reduce to a minimum the risk of any part of a suspended load been wing accidently displaced.

PART –III**GENERA RULES, TO SAFETY EQUIPMENT AND FIRST AID:****Article -10:**

1. All necessary personal safety equipment shall be kept available for the use of the persons employed on the site and be maintained in a condition suitable for immediate use.
2. The workers shall be required to use the equipment provided and the employer shall take adequate steps to ensure proper use of the equipment by these concerned.

Article -11:

When work is carried on in proximity to any place where there is a risk of danger all necessary equipment shall be provided and kept ready for use and al necessary steps be taken for the prompt, reasons of any persons in danger.

Article -12:

Adequate provision shall be made for promptly first and treatment of all injuries likely to be sustained during the course of the work.

Article -13:

Where large work places are situated in cities, town or in the sub-urban and no beds are considered necessary owing to the proximity of city or town hospital, suitable transport shall be provided to facilitate removal of urgent cases to hospital at other work places, some conveyance facilities such as care shall be kept readily available to taken injured persons or persons suddenly taken seriously ill to the nearest hospital.

General specifications:

1. Cement concrete flooring tiles shall be manufactured from mixer of cement natural aggregates and clouring materials where required by pressured process. Fixing manufacture, the tiles shall be subjected to a pressure not less than 140kg/cm^2 .
2. Proportion of cement to aggregate in the backing of the tiles shall be not less than 1:3 by weight.
3. On removal from mould, thatile shall be kept in moist continuously atleast for 7 days and subsequently if necessary for such a longer period that would ensure their conformity to the requirements to Trayanse strength resistence of wet and water absorption and would minimize shrinkage and cracking, tiles shall be stored under covers.
4. Tolerance : tolerance on length and breadth shall be plus or minus one millimeter. Tolerance thickness shall be plus 5mm, the range of dimensions if any of one delivery of tiles shall not exceed 1mm., length and breadth and 3mm., on thickness.

5. THICKNESS OF WEARING LAYERS:

Class of tiles	Minimum thickness of wearing layer
Plain cement and plain coloured tiles general purpose.	3 mm
Plain cement and plain coloured tiles for heavy duty	6mm
(Mosaic) terrace tiles with chips of size varying from the smallest upto 6mm.	5mm
(Mosaic) terrace tiles with chips 12mm size ranging from the smallest upto 12mm, or $\frac{1}{2}$ "	5mm
(Mosaic) terrace tiles with chips of size varying from the smallest upto 20mm or $\frac{3}{4}$ "	6mm

6. Colour and appearance: The colour and texture of the wearing layer shall be uniform through its thickness.
7. When specifying the tiles, the contractor should specifically indicate whether the chips to be used are from the smallest to 20mm, size. The officers of the department shall also specify size of chips by referring the approximate photograph given in indian standard No. 1237/1959.

8. General quality of tiles

Unless otherwise required the wearing face of the terrace tiles shall be mechanically round and filled. The bearing face of the tiles shall be placed, free from projections, depression and bracks (Haircracks not included) and shall be reasonably parallel to the backface of tiles. All angles shall be right angles and all edges shall be sharp and true.

9. BREAKING TRAVERSE STRENGTH OF TILES SHALL BE GIVEN AS BELOW:

Size of tiles cm.	Span cm.	Breaking wet test cm. kg.	Land based dry test Kg
19.85x19.85	15	71	105
24.85x24.85	20	90	120
29.85x29.85	25	99	149

10. The average wet of not less than 12 specimens shall not exceed 2mm., and the weather any individual specimen shall not exceed 2.5cm., when tested in an abrasion testing machine.
11. The average percentage of water absorptions not less than six full tiles, specimen, shall not exceed ten in the case of water absorption test.
12. The density of the tiles shall be in the order of amount 2.4gms. the tiles shall be laid with the minimum possible width of joints and not exceeding 1/32 inches. The joints shall be filled with grey cement to match the finish of the tiles and shall be made almost invisible when the floor is given the final polish. The polishing shall be done by means of electric polisher wherever possible and hand polish to other places like vertical faces, or wall coves and other areas where the machines can have not access and glossy, surface as even as possible.

All angles at junction of vertical faces shall be rounded of the 1 1/2" radius with same quality of materials and colour of the tiles of the floor. But laid in situ and these coves shall be measured as part of flooring and paid for at the same rates and the flat floors. The colours of the tiles shall generally match other coloured face adjustment or as may be directed by Executive Engineer.

The dadoing and skirting have to be finished by giving necessary, faces in the brick wall itself so that the projection does not exceed 1/2" from the face of the wallies, the finish plastered surfaces.

Based on the modulus of rupture of 30kg sq m for dry test and two thirds of the value of wet test.

GUIDELINES FOR ADDITION OF STRENGTH GARDENING OF CONCRETE:

Plain and reinforced concrete have been graded according to the cube compressive strength and designated as M100. M150. M200. M 250. M300 and M400 the designation of concrete the letter refers to the mix and the Number to the specified 28days work cube compressive strength of that mix expressed in Kg/cm².

Approximately the M.100 M150. M200 and M250 grades of concrete corresponds 1:3:6, 1:2:4 , 1:1 1/2:3, 1:1:2 nominal mixes of ordinary concrete used.

The proportion aggregate cement and water to be used for controlled concrete shall be designed by preliminary tests of materials to be actually used to obtain and specified strength with the use of minimum quantity of cement, however the maximum total quantity of aggregate by weight per 50kg of cement shall not normally exceed 450kg.

For any particular item, compressive strength required to be obtained by the concrete at 26days in the preliminary and works tests on the 15cm. cubes minimum cement concrete required to be used and the approximate proportions of approved fine and coarse aggregate shall be specified in the tender schedule. These particulars will be only for the guidance of the contractor for quoting rates.

Immediately upon the receipt of the award of the contract, contractor shall inform the executive engineer, the exact location of the source of the materials where he proposed to use and get the materials approved. The mix with the actual approved materials to be used shall be got designed in an approved laboratory by the contractor with minimum quantity of cement to the specified strength in the preliminary test and the proportions got approved from the Executive Engineer in writing. These proportions shall be used.

So long as the materials continue to be of the same quality and the same sources subject only to slight changes in the relative qualities of fine and coarse aggregate for the purpose of promoting workability provided the works tests also show the required strength.

If during the progress of work the contractor wishes to change the materials the proportion shall be mixed on the basis of fresh preliminary tests to give the required strength after the Executive Engineer is satisfied that the materials satisfy the specification. No adjustment of cost shall be made for change of proportions of cement fixed in the original preliminary tests.

PROPORTIONATE OF MIX:

Each batch of mix shall be proportioned to weight of cement fine aggregate and coarse aggregate water for each batch shall be added in quantity measured by volume or by weight, where weight of cement as determined by accepting the maker's weight per bag a reasonable number of bags shall be weighted separately to check net weight, where the cement is weighted on the site and not in bags its shall be weighted separately from the aggregates.

All the weighting equipments shall be maintained in a clean and serviceable condition and their accuracy checked periodically.

Mixing:

Mixing shall be done only by mechanical mixers. The quantities of the aggregate and water shall be adjusted duly in the field to compensate for bulkage due to the quantity of moisture present in the fine aggregate and free water in the coarse aggregate at the time of use.

TESTS:

Tests shall be got done in an approved laboratory at the cost of the contractor.

A. Preliminary tests

If concrete mixers are specified by its strength then the mix needs to be designed and preliminary tests should be carried.

A preliminary test is conducted in a laboratory of the trial mix of concrete produced in the laboratory with the object of:-

- a. designing of concrete mix before the actual concrete operation starts.
- b. Determining the adjustments required in the designed mix or when there is change in the materials used during the execution of work.
- c. Verifying the strength of concrete mix.

B. works tests :

The test conducted either in the field or in a laboratory on the specimen made on the works out of concrete being used on the works.

The sampling shall be spread as evenly as possible throughout the day, when wide changes in weather conditions occur during concreting additional samples may be taken as desired by Executive Engineer.

All expenses on the tests shall be borne by the contractors nothing extra shall be paid to the contractor for carrying out the tests.

All samples for tests shall be taken in the presence of Assistant Executive Engineer concerned and the contractor or his authorized agent.

All mix design and test data and results shall be maintained as part of the record for the contract and shall be signed by the Assistant Executive Engineer and the contractor.

A register of cement concrete cubes cast and tested giving the following particulars shall be maintained at the site.

1. Name of the work and reference to agreement
2. Sl.No.
3. Date and time of sample taken
4. Sample No.
5. No. of cube
6. Identification works
7. Proportions of mix

8. Description of the portion of work represented by the sample and quantity of concrete represented by the sample.
9. Initials of Assistant Executive Engineer and contractors authorized agent in whose presence sample is taken.
10. Result of 7days test.
11. Result of 28 days test
12. Review remarks by Executive Engineer.

Extract of : IS 456 – 1964

4.2.2.1 :Plain and reinforced concrete shall be in seven graded designed M100, M150, M200, M250, M300, M350 and M400.

Note: in the designation of the concrete mix, letter M. refereed the mix., and the number to the specified 28 days works cube compressive strength of that mix expressed in kg/cm^2 .

4.2.2.2. Strength requirements of concrete

4.2.2.2.1 when a ordinary Portland cement or Portland blasurnace stag cement conforming to accepted standards (vI.5) (21/2 is used the compressive strength requirements for various grades of concrete shall be as given in Table I. Where rauid hardening Portland cement is used the 20 days compressive, strength requirement specified in Table 1. Shall be met at 7days, where other cements are used the Engineer incharge shall specify the corresponding requirements preferably on the basis of preliminary tests.

*IS 269/1458 specification for ordinary rapid hardening and low heat Portland cement is 455/1962 specification for Portland blast slab cement.

4.2.2.2.2.3 strength requirements specified in Table 1 shall apply to both controlled concrete and ordinary concrete (Sec. 4.3.1) preliminary tests need not however be made in the Case of ordinary concrete.

1. In order to get a relatively quicker idea of the quality of concrete, optional works tests on beam for module or reputure at 72-2 hours of at 7days, or compressive strength tests at days may be carried out in additional to 28days compressive strength tests. In all cases, the 28days compressive strength specified in Table 1 shall alone in the criteria for acceptance or rejection of the concrete. If however, from tests carried out in a particular job over a reasonably long period it has been established to the satisfaction of the Engineer incharge that suitable ratio between the 28days compressive strength and the modulus of reputure at 72+2 hours or at 7 days or compressive strength at 8 days may be accepted the Engineer incharge may be suitably relax the frequency of 28 days compressive strength test specified in the table 5 provided the expected strength values at the specified early age are consistently met. For this purpose the values given in Table 2 may be taken for general guidance in the case of concrete made with ordinary cement.

b. where the strength of concrete mix, as indicated by tests, lies between strength for any two grades specified in Table 1. such concrete shall be classified for all purpose as a concrete belonging to the lower of the two grades between which its strength lies.

4.3 PROPORTIONING AND WORKS CONTROL

4.3.1 methods of proportioning the determination of preparations of cement aggregate and water to attain the required strength shall be made by one of the following.

- a. With preliminary tests by designing the concrete mix such concrete shall be called controlled – concrete.
- b. Without preliminary tests by accepting nominal concrete mixes such concrete shall be called “Ordinary Concrete”.

4.3.2.1 Controlled concrete:

4.3.2.1 As far as practicable, controlled concrete should be used on all concrete works, controlled concrete for use in plain and reinforced concrete structure shall be in grades M100, M150, M200, M250, M300, M350 and M400.

4.3.2.2 : The concrete mix shall be designed to have an average strength corresponding to the values specified for preliminary tests in Table.1. The proportions chosen should be such that the concrete has adequate workability for the conditions prevailing on the work in question and may be properly compacted with the means available.

The maximum, total quantity of aggregate by weight per 50kg. of cement shall not exceed 450 kg except where otherwise specifically permitted by the Engineer incharge.

4.3.2.3 Except where it can be shown to the satisfaction of the Engineer incharge that supply of properly grade aggregate of uniform quality can be maintained over the period of works the grading of aggregate should be controlled by obtaining, the coarse aggregate in different sizes and blending them in the right proportions when required, the different sizes being stocked in separate stock piles the materials should be stock piles several hours preferably a day before use. The grading of coarse and fine aggregate should be checked as frequently as possible the frequency for a given job being determined by the Engineer, incharge to ensure that the suppliers are maintaining the grading uniform with samples that of the samples used in the preliminary tests.

4.2.3.4 in proportioning concrete the quantity of both cement and aggregate should be determined by weight. Where the weight of cement is determined by accepting the manufacturer's weight per bag a reasonable number of bags, should be weighed separately to check the net

weight. Where the cement is weighted on the site and not in bags, it should be weighted separately from the aggregates. Water should on either measured by volume in colibrated tanks (or) weighted all measuring equipments should be maintained in a clean serviceable condition and their accuracy periodically checked.

4.2.3.5 it is most important to maintain the water cement ratio constant at its correct value. To this end determination of moisture contents in both find and coarse aggregate should be made as frequency as possible the frequency for given job being determined by the Engineer incharge according to weather conditions the amount or the added water should be adjusted to compensate for any observed variations in the moisture contents. For the determination of moisture content in the aggregate is /2386 part III 1963. Methods of test for aggregate for concrete part III specific gravity, density, voids, obsorption building, may be referred to allow for the variation in weight of aggregate due to variation their moisture content suitable adjustments in the weights of aggregates should also be made.

4.3.2.6 No substitution in materials used on the work for alterations in the established proportions except as permitted in 4.3.2.5 shall be made without additional tests to show that the quality and strength of concrete are satisfactory.

4.3.2.7 Workability of the concrete should be checked at frequent intervals, the slump test or where facilities exist, the compacting factor test – in accordance with IS-1199 and 1950 may be adopted for this propose.

4.3.2.8 A competent person should be employed whose first duty will be to supervise all stage in the preparation and placing of the concrete. All works test specimen should be made and site tests carried out under his direct supervision.

4.3.3 Ordinary concrete:

4.3.3.1 Where it is considered not practicable to use controlled concrete ordinary concrete may be used for concrete of grades M100, M150, M200 and M250. The proportions of materials for nominal concrete mixes for ordinary concrete shall be in accordance with table III.

4.3.3.2 Inproportioning concrete, the quantity of cement should be determined by weight. The quantities of fine & course aggregate may be determined by volume, but these should also preferably be determined by weight. In the latter case the weight should be determined form the volume specified in table III and the weight per litres of dry aggregate. If fine, aggregate is moist and volume batching is adopted. Allowances shall be made for bulking in accordance with IS.2386/ Part III -1963.

4.3.3.3. The water cement ratio shall not be more than these specified in Table III.

The cement concrete of the mix specified in Table III for any nominal mix may be increased if the quantity of water in a mix was to be increased to overcome the difficulties of placement and compaction so that the water cement ratio specified in Table III is not exceeded.

Note 1: In the case of Vibrated concrete, the limit specified may be suitably reduced to avoid segregation.

Note 2: The quantity of water used in the concrete mix for reinforced concrete work should be sufficient but should not be more than sufficient to produce a dense concrete of adequate workability for its purpose which will surround and properly grip, all the reinforcement workability of the concrete should be controlled by maintaining a water cement ratio that is found to give a concrete which is just sufficiently wet to be placed and compacted without difficulty with the means available.

4.3.3.4 Workability of the concrete should be controlled by directed measurement of water content, making allowance for any surface water in the fine and coarse aggregates. The slump test in accordance with IS 1199/1959 may be used as guide.

4.3.3.5 Allowance should be made for surface water present in the aggregate when computing the water content, surface, water shall be determined by one of the field methods described in IS 2336/Part III 1963. In the absence of exact data the amount of surface water may be estimated from the values given in Table 4.

4.3.3.6 If ordinary concrete made in accordance with the proportions given for a particular grade does not yield the specified strength due to proper qualities of materials not being available such concrete shall be classified as belonging to the appropriate lower grade. Ordinary concrete proportioned for a given grade.

In accordance with Table III shall not, however be placed in a higher grade on the ground that the test strength and are higher than the minimum specified no interpolation shall be permissible.

4.4 Sample size and acceptance criteria.

4.4.1 All tests shall be carried out in accordance with IS 516-1959.

4.4.2 The number of test specimen required the frequency of sampling and the criteria for acceptance of a concrete as conforming to the specified grade shall be in accordance with Table V for both ordinary concrete and controlled concrete No preliminary tests are however necessary in the case of ordinary concrete.

TABLE -1 STRENGTH REQUIREMENT OF CONCRETE**CLAUSE 4.2.2.1 AND 4.2.2.2**

All values in Kg/Cm².

Grade of concrete	Compressive strength of 15cm., cubes at 28days after mixing conducted in accordance with IS 516-1959	
	Preliminary test Min	Works test min
M.100	135	100
M.150	200	150
M.200	260	200
M.250	320	250
M.300	380	300
M.350	440	350
M.400	500	400

Note 1: Preliminary Test : A test conducted in a laboratory on the trial mix of concrete produced in the laboratory with the object of

- Designing a concrete mix before the actual concreting operations starts.
- Determining the adjustments required in the designed mix when there is a change in the materials used during the execution (or)
- Verifying the strength of concrete mix

Note 2 : Works Table – All test conducted either in the field or in a laboratory in the specimens made on the works out of the concrete being used on the works.

Note 3: Sizes of Cubes – in the works test with the approval of the Engineer incharge 10cm cub as may be used in place of 15cm provided the maximum nominal size of aggregate does not exceed 20mm even the use of 15cm cubes should normally be restricted to concrete having a maximum nominal size of aggregate not exceeding 40mm size is required to be tested the size of cubes should specified by the Engineer incharge keeping in view that generally the length of size of the cube should be about four times the maximum nominal size of aggregate in the concrete constituting the cube specimen.

Note 4: Strengthening Rotation to size of cube

Where 10cm cubes are used the values obtained from tests, of 10cm s cubes shall be reduced to the extent established by comparative preliminary tests with 10& 15cm. cubes or in the absence of such compressive test, by 10 percent of the value of determined from the tests in order to give the equivalent strength for 15cm., where cubes larger than 15cm are adopted generally modification is necessary unless otherwise specified by the engineer incharge.

Note 5: Cylinder strength:

Compressive strength tests may with approval of the engineer incharge be conducted on 15cm diameter and 30cm., high cylinders in accordance with IS-516-1959 instead if a cube, where cylinder strength figures are adopted the compressive strength figures given above shall be modified according to the formula, minimum cylinder compressive strength required 0.8 compressive strength specified 15cm cubes.

The central Road Research institute, New Delhi has carried out tests with a view to establishing a relation between water cement ratio and the compressive strength concrete using ordinary Portland cements manufactured in the country in accordance with IS 269-1959.

As a result of these, it has been considered advisable to give graphs showing the relationship between the compressive strength of concrete mixes with different water cement ratios and the 7 days compressive strength of cement tested in accordance with IS-269-1959. These graphs have been given in appendix as they would be of some assistance in obtaining the water cement ratio for trial mixes of concrete.

Table II : Optional work Test Requirement of Concrete:

(Clause 4.2.2.2 (a):

(All values in kg/cm².)

All test shall be conducted in accordance with IS : 516 – 1959

Grade of concrete	Compressive strength on 15cm cube min. at 7day	Modulus of rupture by beams test	
		At 72+2 Hours	At 7 Days
M.100	70	12	17
M.150	100	15	21
M.200	135	17	24
M.250	170	19	27
M.300	200	21	30
M.350	235	23	32
M.400	270	25	34

Note : Note 2 and 3 under tables I are also applicable to Table II

Table III:
CONCRETE MIX PROPORTIONS
(Clause 4-3-5)
ORDINARY CONCRETE

Grade of concrete	Total quantity of dry aggregate by volume per 50 kg of cement to be taken at the sum of the individual volume of fine and course aggregate mix	Proportion of fine aggregate to course aggregate	Quantity of water per 50 kg of cement mix
1	2	3	4
M.100	300	Generally 1:2 for fine aggregate to course aggregate by volume but subject to upper limit of 1:1 ½ and a lower limit of 1:3	34
M.150	220	-do-	32
M.200	160	-do-	30
M.250	100	-do-	27

Note 1: The proportion of the aggregate should be adjusted from upper limit of lower limit progressively as the grading of the fine aggregate become fine and the maximum size of course aggregate become larger.

Examples: For an average grading of fine aggregate that is zone II. I.S. 383/1963 the proportion shall be 1:1½ , 1:2 and 1:3 for maximum size of aggregate 10mm, 20mm and 40mm respectively.

Note 2: It may be noted for general guidance that M.100, M.150, M.200 and M. 250 of ordinary concrete corresponding approximately to 1:3:6, 1:2:4, 1:1½ :3 and 1:1:2 nominal mixes of ordinary concrete currently used in the country.

Table IV: Surface with water carried by average aggregate :

Aggregate	Approximate quantity of surface water (M3)
(1)	(2)
Very wet sand	120
Moderately by wet sand	60
Moist sand	40
*Moist gravel or crushed rock	20 to 40

*Coarser the aggregate less the water it will carry.

AMENDMENT TO THE TAMIL NADU TRANSPARENCY IN TENDERS RULES

**[G.O.Ms.No.309, Finance (Salaries), 17th October 2017, Purattasi 31,
Hevilambi, Thiruvalluvar Andu – 2048]**

No.SRO A-46(d)/2017.

In exercise of the powers conferred by sub-section (1) of Section 22 of the Tamil Nadu Transparency in Tenders Act, 1998 (Tamil Nadu Act 43 of 1998), the Governor of Tamil Nadu hereby makes the following amendment to the Tamil Nadu Transparency in Tenders rules, 2000.

2. The amendment hereby made shall come into force on 17th day of October, 2017.

AMENDMENT

In the said rules, after rule 13, the following rule shall be inserted, namely:-

“13-A. General Condition :- The tender document shall include a condition that all the contractors and sub-contractors hired by main contractors shall engage construction workers registered with the Construction Workers Welfare Board as required under the Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996 (Central Act 27 of 1996)”.

Special Conditions for Quality Control System

- 1) The Contractor shall establish Quality Assurance and Quality Control Systems In accordance with Quality Assurance Plan to prove compliance with the requirements of the contract as approved by the Executive Engineer (or) Engineer-in charge concern.
- 2) The Contractor shall provide all apparatus, assistance, documents and other information, electricity, equipment, fuel consumables, instruments, labour, materials and suitably qualified and experienced staff as are necessary to carry out the specified test efficiently. The samples shall be collected and the tests may be conducted in the presence of the Engineer-in-Charge or his authorized representatives.
- 3) Alternatively, the contractor may test the materials during execution of works at the reputed laboratories approved by the Executive Engineer **at the contractors own cost**, provided that the samples are collected with proper identification marks in the presence of the Engineer-in-Charge or his authorised representative.
- 4) The frequency of testing of materials shall be in accordance with the relevant IS codes.
- 5) Compliance with the Quality Assurance / Quality Control Systems shall not relieve the contractor of any of his duties, obligations or responsibilities covered under the contract.
- 6) The Engineer-in-charge shall check the contractor's work and notify the contractor of any defects that are found. Such checking shall not affect the contractor's responsibilities. The Engineer-in-charge may instruct the contractor to search for a defect and to uncover and test any work that the Engineer-in-charge considers may have a defect.
- 7) If the contractor has not corrected a defect within the time specified in the Engineer-in-charge notice, the Engineer-in-charge will assess the cost of having the defect corrected, and the contractor have to bear the costs.

Name of Work: Construction of Kurunji Marriage Hall and Renovation work for Muthukumarar Marriage Hall in Arulmigu Kulanthaivelappar Thirukovil at Ottanchathiram.

I. Price Adjustment

1. For the works with contract period

Pending receipt of Amendment to Rule 14 (8) of Tamilnadu Transparency in Tenders Rules. 2000, Price Adjustment clause shall apply for 'this work as per GO. (Ms) NO.101, Public Work (G2) Department, dated 10.06.2009 with following criteria.

In the said Government Order, for sub para (1) of para 3 the following shall be substituted, namely:-

(1) Price Adjustment

(a) Contracts of more than 12 months

Full price adjustment on all the components including cement, steel, bitumen and

Petroleum, oil and lubricants (POL) shall be applicable to the works with contract period of more than 12 months instead of the present system of 18 months.

(b) Contracts of 12 months and below.

In respect of contracts of 12 months and below, price adjustment shall be applicable in respect of cement, steel, bitumen and petroleum, oil & lubricants (POL) only.

- i) Price adjustment clause will be applicable for all works where value of work put to tender costing RS.100 lakhs and above. However, No Price Adjustment will be applicable for Maintenance and Repair works.
- ii) Price adjustment will apply only when the rates exceed or decrease by 3% or more as compared to the-estimate rates (RBI Index Price).
- iii) The price adjustment shall be calculated only on the departmental estimated cost of the work.
- iv) In respect of bitumen and POL, it may be considered on 'pass through' basis with payment of actual rates / price at the rates charged by Indian Oil Corporation.
- v) All works for which price escalation/ variation is contemplated must have milestones fixed in physical terms and have a prefixed time-line for use of inputs-clearly indicating the nature and quantum of eligible inputs to be used for the work for the relevant period between two mile stones. Price variation/escalation will be applicable for those quantities 'actually', used by the contractor including additional quantities, if any, used or achieved ahead of the time line. However, if the contractor does a certain quantity of the work in the third quarter which ought have been done in earlier quarter, price variation/escalation will still be applicable on that quantity at the rates applicable in the relevant quarter as per time-line or period of actual use whichever is less.
- vi) Liquidated damages will be imposed on the contractor for the lapses / shortfall in achieving

the rate of progress as per existing schedule.

vii) The price adjustment mechanism will cease to operate for value of work executed beyond the agreement period. But agreement period shall include the "actual period" for which the work was "suspended officially" and extension of time permitted for any valid reasons such as, war, natural calamities, like flood, earthquake and other risks arising out of acts of God during the agreement period; work delayed due to the land acquisition process; change in design, change in scope of work, etc., which is given in writing by the Tender Calling Officer of the respective work.

- c. Price variation will be calculated once in a quarter (i) in respect of cement and steel for the works with contract period upto 12 months and (ii) in respect of all components except bitumen and Petroleum, Oil & Lubricants (POL), for the works with contract period of more than 12 months, as per the specified formula from the last date of submission of bid upto the end of agreement period provided, if the agreement is signed within the minimum specified time, failing which, the price variation will be applicable from the date of agreement only, based on the wholesale price' indexes of RBI. The quarter would be reckoned with reference to the quarter of the calendar year in which the last date on bid submission is fixed. In case of delayed agreement, the quarter in which the agreement is signed will be reckoned for the purpose of calculation of price adjustments.
- d. Price variation will be operated by the respective Divisional Engineers / Executive Engineers.

CEMENT:

$$V_c = 0.85 \times P_c \times R \times \left[\frac{C_1 - C_0}{C_0} \right]$$

Where,

V_c : Increase or decrease In the cost Of cement for the work done 'during the quarter under consideration.

P_c: Percentage of cement used on the work during the period (total quantum of cement shall be calculated base on the provisions allowable as per standard data for each Items involved in the work and the percentage of cement used during the period shall be assessed based on the milestone fixed)

C₀: Index number of whole sale prices in India for cement under table 39 of Reserve Bank of India Bulletin released by the department of Economics Analysis & Policy, Reserve Bank of India for the Quarter in which the agreement has been signed.

Ci: Index number of whole sale prices In India for cement under table 39 of RBI Bulletin released by the Department of Economics Analysis and Policy. RBI for the Quarter under reference in which the measurement recorded in the M-book to which the particular Bill payment is related.

R: Total value of cement involved in the work as per department rate adopted in the estimate.

• **STEEL:**

$$Vc = 0.85 \times Pc \times R \times \left[\frac{Si - So}{So} \right]$$

Where,

Vs: Increase or decrease in the cost of steel for the work done during the quarter under consideration.

Ps: Percentage of steel used on the work during the period (total quantum of steel shall be calculated based on the provisions allowable as per structural design calculations approved for each steel members I slab involved in the work and the percentage of steel used during the period shall be assessed based on the mile stones fixed)

So: Index number of whole sale prices in India for steel under table 39 of Reserve Bank of India Bulletin released by the Department of Economics Analysis and Policy, RBI for the Quarter under reference in which the agreement has been signed.

Si : Index number of whole sale prices in India for steel under table 39 of RBI Bulletin released by the Department of Economics Analysis and Policy, RBI for the Quarter under reference in which the measurement recorded in the M-Book to which the particular Bill payment is related.

R: Total value of steel involved in the work as per department rate adopted in the estimate.

Explanations:

- The Price Adjustment will be calculated once in a quarter.
 - The quarter will be reckoned with reference to the quarter in which the date of agreement is falls.
 - The Index number of whole sale prices in India for the each quarter to be taken in to account as indicated below, for the purpose of arriving at the price variation.

Quarter	Months involved	The Index number of whole sale prices of India for the month
1 st quarter of the year	- January - March	January
2 nd quarter of the year	- April - June	April
3 rd quarter of the year	July - September	July
4 th quarter of the year	October - December	October

• This price adjustment shall be calculated in respect of cement and steel based on the department rate adopted in tile estimate.

- The price adjustment shall also apply for the materials viz. Bitumen & POL, on pass through basis whenever the Indian Oil Corporation revises their prices.
- The difference in cost payable to be contractor under this clause will be paid along with the final bill payable to the Contractor.

POL IN RESPECT OF MACHINERIES USE

$$V_f = 0.85 \times P_f \times R \times \left[\frac{F_i - F_o}{F_o} \right]$$

V_f: Increase or decrease in the cost of POL for the work done during the quarter under Consideration.

P_f: The weightage of fuel component on the hire charge of machineries shall be taken as 15% of the total hire charge.

F_o: Cost of POL on the date of agreement.

F_i: Cost of POL as per the revision ordered by Indian oil Corporation

R: Higher charge of the machinery Involved for each Item of work

POL IN RESPECT OF CONVEYANCE :

- The increase / decrease in cost of fuel (high density diesel) whenever announced by Indian oil Corporation may be calculated & conveyance charges for every item arrived at and actual difference shall be paid based on the following formula.

$$V_f = \left[\frac{F_i - F_o}{F_o} \right] \times \left[1 / 4.50 \right] \times \left[1 / 5.66 \right]$$

Where,

V_f: The increase I decrease in cost of fuel due to the revision in cost of fuel (diesel) for the co-efficient 1.60 under column 5 for Sl.No.2 of the conveyance table approved In Schedule of Rates.

F_i: The coat of fuel on the date of agreement

Fo: The cost of fuel as per the revision ordered by Indian Oil Corporation.

4.50 : Average kilometre per one litre.

5.66 : The load that Can be carried by a Lorry.

2. Price Adjustment for the works with contract period of more than 12 Months

- Price adjustment for all the Components shall be applicable where the period of contract is more than 12 months based on the mile stones fixed.
- It shall apply only for the 5th mile stone and above.
- The price variation other than cement steel, bitumen & POL shall be calculated based on the schedule of rates of Subsequent year.
- The method of adopting price adjustment clause for cement, steel, bitumen & POL shall remain the same as already explained under clause I (i) above.

General:

Price adjustment clause shall apply only when,

- The work is progressing as per the mile stones fixed on physical terms.
- The quantum of cement, steel, bitumen & POL required for use on work during each quarter shall be mentioned in the tender schedule as well in the agreement itself in physical terms.
- Further, If the contractor does a certain excess quantum of work In the second quarter itself. Which is expected to be done in the third quarter as per mile stone fixed shall be eligible for price adjustment.
- Similarly, if the contractor does a certain quantum of work In the third quarter, which should have been done in the second quarter itself, as for mile stone fixed, is not eligible for price adjustment.
- This clause shall be applicable for the period from the date of agreement upto the end of agreement period. The agreement period shall include the "actual period" for which the work was "Suspend officially" and the extension of time permitted for any of the valid reasons such as, war, natural calamities like, flood, earth quake, other risks arising out of acts of God during the agreement Period" work delayed due to the land acquisition process, changes in design change In scope of work etc. In writing by the Tender inviting Authority for the work.
- The Joint Commissioner/Executive Officer concerned are empowered to arriving at the price variation and also for making payments / recoveries, under this clause. .

II. MILE STONES :

Mile stones shall be fixed in physical terms towards the usage of cement & steel for every quarter. Preferably, actual quantity of cement & steel required for every quarter for the early completion of the project Within the specified agreement period, based on the guidelines Issued in respect of fixation period of completion.

Quarter	Quantity of cement	Quantity of steel
1 st QuarterMetric toneMetric tone
2 nd QuarterMetric toneMetric tone
3 rd QuarterMetric toneMetric tone
4 th QuarterMetric toneMetric tone

III. LIQUIDATED DAMAGES:

- It for may reason, which does not entitle the contractor to an extension of time. The rate of progress of works. (or) any section of work is at any time. In the opinion of the Executive Engineer, in charge considered to be very slow to ensure the completion within the prescribed time (or) extended time for completion, the Executive Engineer, In charge shall notify the contractor In writing and contractor shall there upon take such steps as may be necessary. and the Executive Engineer', in charge may ask the contractor to expedite progress so as to complete the works (or) section of work within the prescribed Ume (or) extended time.
- The contractor shall not entitle for any additional payment for taking such steps. As a result of any notice given by the Executive Engineer, In charge under this clauBe, the contractor may seek the Executive Engineer concerned, permission to do any work at night hours (or) on Sundays also, which clays are recognized locally as days of rest or equivalent recognized days. Such permission shall' not be unreasonably refused by the' Engineer-In-Charge.
- If the contractor fails to 'complete whole of the works (or) any part there of (or) section of the works within the stipulated period of individual quarterly mile stones, (including any bonafide extensions allowed by the competent authority without levying liquidated damages) the Executive Engineer, concerned "lay without prejudice to any other method of recovery may deduct 0.1% of contract value per calendar day or part there of for the period of delays occurred, subject to a maximum of 10% of the contract value.
- The penal amount may be recovered from any amount which may be due to be paid for the work done by him. Further, the receipt of payment or deductions of such damages

from the contractors shall not relieve the contractor from his obligation to complete the works (or) from any other his obligations and liabilities under the contract.

- The liquidated damages for the Whole of the work shall be filled up at the time of concluding agreement as below :

		Penalty	
Mile stone – I	-	Rs.	Per day
Mile stone – II	-	Rs.	Per day
Mile stone – III	-	Rs.	Per day
Mile stone – IV	-	Rs.	Per day

The mile stones shall be fixed at the time of agreement after obtaining programme of work

IV. BONUS FOR ADVANCE COMPLETION OF WORK:

- Bonus as an' incentive for the advance completion of work by the contractor at a minimum of one tenth of the period on the period of Completion, shall be entitle for the bonus at 1% on the value of the actual quantum of work executed by him at the tendered rate.
- The Engineer, Incharge shall in writing notify to his higher authorities about the early completion of the work. It should be ensured that the completion report for the work should have been Issued in the case before making payment towards bonus to the contractor.

V. BID CAPACITY:

- The experience of the contractor In the particular field may be taken Into account from any period of his total carrier
- The annual turn over by the contractor also maybe taken into account from any period of his total carrier Provided that, the contractor shall remain in live list till date

Table IV: Preliminary Test : **WORK TEST** ACCEPTANCE CRITERIA FOR CONCRETE (ALL GRADE)

Minimum No. of specimens from each batch (cubes)		Minimum Frequency	Criteria for acceptance	Minimum No. of specimens taken from the same days work				Minimum Frequency		Criteria for acceptance
				Cubes		Beams				
7days compressive strength test as optional test if desired	28 days compressive strength test			7 days compressive strength test as an optional test if desires	25 days compressive strength test	72+2 Hours test as an optional test if desired	7 days test as an optional test if desired	In terms of the quality of concrete	In terms of period	
1	2	3	4	5	6	7	8	9	10	11
5	5	For each batch with a minimum of three batches	Accept for if average compressive strength of the specimen tested is not less than the compressive strength specified in Table –I (For Optional tests See Table-2) subject to the condition that only one out of five consecutive test may give a value less than specified strength	3	3	3	3	For every 150 cubic metre of concrete or part thereof	At such intervals as the Engineer incharge, may decide. However in the case of concrete sample shall be drawn on each day for the first four day of concreting and there after atleast. Once in 7 days of concreting	Accepted to average strength of the specimen test is not less than the strength specified Table –I (For optional test see Table-2) subject to the condition that only one out of three consecutive test may give a value less than the specified. Strength but this shall not be less than 90% for the specified strength

1	2	3	4	5	6	7	8	9	10	11
---	10	For each batch with a minimum of three batches	Accept if average compressive strength of the specimens tested is not less than the compressive strength specified in Table-I subject to the condition that the average compressive strength shall be more than the specified compressive strength in Table-I, by atleast the value of standard deviation* of the series of the test * Standard deviation	5	5	5	5	For every 150 cubic metre of concrete or part thereof	At such intervals as the Engineer incharge may decided. However in the case of controlled concrete samples shall be drawn on each day for the first four days of the concreting and there after atleast one se ven days concreting	Accept if average strength of the specimen tested is not less than strength specified in Table-I (For optional tests see Table-32) subject to the condition the one out of five consecutive tests may give a value less than the specified strength.
* standard deviation = $d^2/(n-1)$ Where 'd' individual deviation from the average and 'n' number of specimens tested										

ARULMIGU DHANDAYUTHAPANI SWAMY THIRUKKOIL, PALANI

Price Tender Schedule

Tender Date : 05.08.2022

E.M.D Amount : Rs.43,000/-

Period of contract : 6 Months

**Name of work : Construction of Kurunji Marriage Hall and Renovation work for Muthukumarar Marriage Hall
in Arulmigu Kulanthaivelappar Thirukovil at Ottanchathiram**

S. no	Qty.in figures & words	DESCRIPTION	TNBP NO	Unit of calculation	Rate of payment to be entered both in fig & words	Total amount in Rs.
1	2.50cum (Two point five zero cubic metres)	Dismantling RCC	18	1m ³ (one cubic metre)		
2	273.00sqm (Two hundred and seventy three square metres)	Dismantling Pressed tiles & weathering course	18	1m ² (one square metre)		
3	11.00cum (Eleven cubic metres)	Dismantling Brick / stone masonry in Cement mortar walls under 3m high	18	1m ³ (one cubic metre)		
4	52.00sqm (Fifty two square metres)	Dismantling Floor finish and dadoing walls in cement mortar with mosaic tiles / glazed tiles / cuddapah slabs	18	1m ² (one square metre)		
5	65.00cum (Sixty five cubic metres)	Earth work excavation for foundation in all soils and sub-soils and to full depth as may be directed except in rock requiring blasting inclusive of shoring shuttering, bailing out water wherever necessary and depositing the surplus earth within the compound in places shown by the departmental officers with an initial lead of 10 mts and initial lift of 2 mts. and clearing and levelling the site, etc., complete complying with standard specification.	23 & 24	1m ³ (one cubic metre)		

6	62.50cum (Sixty two point five zero cubic metres)	Supplying and filling in foundation, basement, etc with filling sand in layers of not more than 15 cm thick well watered, rammed and consolidated etc. complete complying with standard specification and as directed by the departmental officers.	24 & 25	1m ³ (one cubic metre)		
7	7.00cum (Seven cubic metres)	Supplying and filling in foundation, basement, etc with Sand Gravel mix in ratio of 1:1 in layers of not more than 15 cm thick thoroughly mixed, well watered, rammed and consolidated etc. complete complying with standard specification and as directed by the departmental officers.	24 & 25	1m ³ (one cubic metre)		
8	214.00cum (Two hundred and fourteen cubic metres)	Supply and filling in foundation and basement with Gravel Complying with standard specification and as directed by the departmental officers	24 & 25	1m ³ (one cubic metre)		
9	13.00cum (Thirteen cubic metres)	Cement Concrete 1:5:10 (One cement, Five sand and Ten hard broken stone) using 40 mm gauge hard broken jelly for flooring including laying, consolidating, finishing, rendering the top surface rough to receive the floor, curing, etc. complete complying with standard specification. (The rate is inclusive of necessary planking for panelling wherever necessary and as directed by the departmental officers	28	1m ³ (one cubic metre)		
10	5.50cum (Five point five zero cubic metres)	Plain Cement Concrete 1:2:4 (one cement, two sand and four hard broken stone jelly) using 20mm jelly for wearing coat including laying, compacting, finishing and curing, etc., complete as per standard specifications and as directed by the departmental officers.	28	1m ³ (one cubic metre)		

11		Providing and laying in position, Standardised Concrete Mix M-20 Grade in accordance with IS:456-2000, using 20mm and down graded hard broken granite stone jelly for all RCC items of works with minimum cement content of 325 kg/m ³ and maximum water cement ratio of 0.55, including admixture (plasticiser / super plasticiser) in recommended proportions as per IS:9103 to accelerate, retard setting of concrete, improve workability without impairing strength and durability with about (5 cu.m.) 7730 kg. of 20mm machine crushed stone jelly and with about (3.3 cu.m.) 5156 kg. of 10-12mm machine crushed stone jelly and with about (4.79 cu.m.) 7670 kg. of sand, but excluding cost of reinforcement grill and fabricating charges, centering and shuttering and also including laying, vibrating with mechanical vibrators, finishing, curing, etc. and providing fixtures like fan clamps in the RCC floor/ roof slabs wherever necessary without claiming extra, etc., complete complying with standard specification and as directed by the departmental officers. The coarse and fine aggregates to be used should comply with the requirements of IS Standards. (No separate payment will be made by the Department for the excess usage of materials).	30			
a	9.50cum (Nine point five zero cubic metres)	Basement		1m ³ (one cubic metre)		
b	6.00cum (Six cubic metres)	Ground floor		1m ³ (one cubic metre)		
c	9.50cum (Nine point five zero cubic metres)	First floor		1m ³ (one cubic metre)		
12	32.43qtl (Thirty two point four three quantal)	Supplying, fabricating and placing in position Mild Steel / Ribbed Tor Steel grills for all RCC works as per design given including cost of steel and G.I. binding wire in all floors etc. complete complying with standard specification. (Contractor has to make his own arrangements for the supply of steel and binding wire)	86	1Qtl (One Quantal)		
13		Providing form work for centering the soffits of all reinforcement cement concrete surfaces M.S. Sheets of 90 x 60cm x 10 gauge stiffened with welded M.S angle of size 25x25x3mm laid over silver oak joints of size 10cm x 6.50cm spaced at about 90cm centre to centre and supported by casurina props of 10cm to 13 cm dia spaced at 75cm centre to centre complying with standard specification and as directed.	30 & 44H			

a	45.00sqm (Fourty five square metres)	Below Ground Level		1m ² (one square metre)		
b	147.50sqm (One hundred and fourty seven point five zero square metres)	Roof slab and Beams, sunshade		1m ² (one square metre)		
c	70.00sqm (Seventy square metres)	column		1m ² (one square metre)		
14		Brick work in Cement Mortar 1:5 (one cement & five sand) using best quality of country bricks of size 8-3/4" x 4-1/4" x 2-3/4" for foundation and basement including curing, etc., complete complying with standard specification.	31 & 31C			
a	6.00cum (Six cubic metres)	Basement		1m ³ (one cubic metre)		
b	20.50cum (Twenty point five zero cubic metres)	Ground floor		1m ³ (one cubic metre)		
c	76.00cum (Seventy six cubic metres)	first floor		1m ³ (one cubic metre)		
15	218.00sqm (Two hundred and eighteen square metres)	Special ceiling plastering and finishing the exposed surface of all RCC items of work such as slabs, beams, sunshades, facia, canopy slab, staircase waist slab, landing slab etc., with Cement Mortar 1:3 (One Cement and Three Sand) 10mm thick including hacking the surfaces, providing cement mortar nosing, beading for sunshades, staircases, steps, landing slabs and curing, etc., in all floors complying with standard specification and as directed by the departmental officers	56 & 57	1m ² (one square metre)		
16	892.00sqm (Eight hundred and ninety two square metres)	Plastering with Cement Mortar 1:5 (One cement and Five sand), 12mm thick in all floors including curing etc. complete complying with standard specification and as directed by the departmental officers.	56 & 57	1m ² (one square metre)		

17	15.00sqm (Fifteen square metres)	Flooring with design ceramic tiles of size 305 x 305 x 6 mm laid over 20 mm thick cement mortar 1:3 (One Cement and Three Sand) base mortar over the existing slab / floor including cutting the tiles to the required size with special cutter wherever necessary, laying in position and pointing with white cement mixed with colouring pigment at the rate of 0.3 Kg. / sq.m. etc., complete complying with standard specification. (The make and brand of the tiles should be got approved by Executive Engineer before use on works)	39A & 39J	1m ² (one square metre)		
18	80.00sqm (Eighty square metres)	Dadoing walls with designed best approved quality, white / colour glazed tiles of 300mm x 200mm x 6mm sizes set in Cement Mortar 1:2 (One Cement and Two sand) 10mm thick and pointing the joints with white cement mixed with colouring pigments at the rate of 0.40 Kg. / sq.m. neatly in all floors, curing, etc., complying with standard specification and as directed by the departmental officers.	39A & 39J	1m ² (one square metre)		
19	15.50sqm (Fifteen point five zero square metres)	Paving the floor with pre-polished concrete anti-skid tiles (Required shape and design) of 20mm thick of approved quality and colour laid in Cement Mortar 1:3 (One Cement and Three sand) 20mm thick and pointed with white cement mixed with colouring pigment at the rate of 0.40 Kg. / sq.m., curing, etc., complete complying with standard specification and as directed by the departmental officers. (The make and brand of the tiles should be got approved by Executive Engineer before use on works)	39A & 39J	1m ² (one square metre)		
20	152.00sqm (One hundred and fifty two square metres)	Paving the floor with kota stone slab of size 600 x 600 of 18 / 20mm (un-polished) in all floors laid in of cement mortar 1:3 (one cement three sand), 20mm thick and pointed with colour cement neatly including polishing with polishing stone and oxalic acid etc., so as to perfectly smooth and glossy and including hire charges for polishing machine and power consumption charges etc. The kota stone slabs and other materials to be used shall be got approved by the Executive Engineer concerned before use on work, etc., complete as per standard specification.	special	1m ² (one square metre)		
21	336.00sqm (Three hundred and thirty six square metres)	Paving the floor with best quality Verified (Matt finish) Tiles of size 600 x 600 x 8mm of approved colour, shade and quality laid in cement mortar 1:3 (one cement and three sand) 20mm thick in all floors and the top pointed with the white cement mixed same colour pigments etc., complete complying with standard specification. (The make and brand of the tiles should be got approved by Executive Engineer before use on works)	special	1m ² (one square metre)		

22	248.00sqm (Two hundred and forty eight square metres)	polishing the floor with kota stone slab including polishing with polishing stone and oxalic acid etc., so as to perfectly smooth and glossy and including hire charges for polishing machine and power consumption charges etc. The materials to be used shall be got approved by the Executive Engineer concerned before use on work, etc., complete as per standard specification.	special	1m ² (one square metre)		
23	145.00sqm (One hundred and forty five square metres)	Pointing with Cement Mortar 1:3 (one cement & three sand) for cut stone walls and walls using including all cost and conveyance of all materials etc, complete.	62	1m ² (one square metre)		
24	3.00sqm (Threesquare metres)	Paving the floor with best approved quality fine polished Granite Stone Slabs of size 1200 x 600 of 18 / 20mm thick of Synthetic Grey, Paradise and similar varieties with machine cut edges laid over a cement mortar bed of 20mm thick using cement mortar 1:3 (One cement and three sand) fixing the slabs with required cement slurry and laid in true right angles with minimum possible width of joints and pointing the joints with white cement mixed with matching colouring pigments etc., The granite stone slabs and other materials to be used shall be got approved by the Executive Engineer concerned before use on work, etc., complete as per standard specification.	special	1m ² (one square metre)		
25	297.50Rmt (Two hundred and ninety seven point five zero running metres)	Providing single Nosing for Granite slab including all cost materials, labour charges, transportation and all conveyance etc, complete.	special	1Rmt (One running metre)		
26	133.00cum (One hundred and thirty three cubic metres)	Construction of granular sub-base by providing close graded materials,mixing in a mechanical mix plant at OMC,Carriage of mixed Material to work site,spreading in uniform layers with motor grader on prepared surface and compacting with vibratory power roller to achieve the desired density, complete.	special	1m ³ (one cubic metre)		
27	622.00sqm (Six hundred and twenty two square metres)	Supplying and laying Interlocking paver block 63mm tk 50% of Terracotta colour paper 50% of gray colour paver block with M30 grade cement concrete using 6mm chips including levelling the base preparation of sub base, laying out the paver, cut the places to fit the edge, vibrating the pavers and sweeping the sand (grouting) and transportation charges loading and unloading charges, all taxes and laying charges etc., complying with std., specification.,	special	1m ² (one square metre)		

28	4 nos. (Four numbers)	Supplying and fixing in position White / Colour Glazed Model Floor Mounted European Water Closet of best quality and approved make with 100mm “P” or “S” trap connecting with CI pipe of 100mm dia / PVC pipe of 110mm dia, double flapped rigid PVC black seat and seat cover with CP brass hinges including cost of white cement, cement for packing, spun yarn, teak wood plugs, brass screws, etc., including supplying and fixing 10 litres capacity PVC / 12.5 litres capacity porcelin low level flushing tank with a pair of CI brackets, etc., complete with all fittings, such as, 15mm brass ball valve with polythene float with brass handle, union coupling connected by means of 40mm white PVC flush hand using indian adopter joint including all internal fittings, such as, 15mm brass connections, 15mm GM wheel valve, 15mm brass nipple (2 Nos.), 15mm nylon connection, TW plugs, screws and also giving necessary connection to the PVC pipe and painting the CI brackets with 2 coats of approved paint over one coat of red oxide primer, dismantling the masonry and re-doing the dismantled masonry to original condition, etc., complete complying with standard specifications. (The EWC and flushing tank with all accessories should be got approved by the Executive Engineer before use on works) Floor Fitting	special	Each		
29	4 nos. (Four numbers)	Supplying and fixing of Oval Shape Wash Hand Basin of size 560 x 450mm with a pair of cast iron brackets, including cost 15mm dia brass CP pillar tap, 32mm dia "B" class GI waste pipe with rubber plug and chain, 15mm dia GM wheel valve, 15mm brass nipple, 15mm dia nylon connection, 32mm dia CP brass waste coupling including fixing of wash basin using CI brackets on to the wall in position with TW plugs and screws, rubber washers, white lead and giving necessary water supply connection and painting the brackets with two coat of painting over a priming coat of anti-corrosive paint including testing for leakages etc., complete complying with standard specification and as directed by the departmental officers. (The wash hand basin and specials should be got approved by the Executive Engineer before use on works).	special	Each		
30	6.50sqm (Six point five zero square metres)	FRP Door Sutter with FRP Door Frames made out of FRP Sheets of 3mm thick of over all size 65mm x 50mm with rebate suitably reinforced using MS Angle /Flats, cost of holdfasts and Solid Core FRP Shutter Panel of 5mm thick and hollow core frames of 3m wall thickness for styles and rails etc., of sizes specified by Engineers.	special	1m ² (one square metre)		

31	6.50sqm (Six point five zero square metres)	Supplying and fixing of Flush door shutter Single leaf in position using 35mm thick solid core Flush shutters with commercial ply on both sides with teak wood lipping alround including cost and labour for fixing the hold fasts and furniture fittings etc.,complete as directed by the departmental officers complying with standard specification.	special	1m ² (one square metre)		
32	0.20cum (Zero point two zero cubic metres)	Supplying and fixing of country wood door frame with high quality country wood with 5" x3 " including necessary shaping, wastage, etc, as per approved plan and design, The door should be got approved from the Executive Engineer.	special	1m ³ (one cubic metre)		
33	35.00sqft (Thirty five square feet)	Supplying and fixing of Teakwood for Temple pattern ornamental doors with high quality teakwood (country)with 5" minimum to 7" maximum thick ornamental frames,2" thick to 5" thick kamalam (flower planks), creeper, birds, animal figures, sculptures etc, backside 1" thick to 3" plank including necessary carving, shaping, wastage, etc, as per approved plan and design, The door should be got approved from the Executive Engineer before use on work	special	1 Sqft (One Square feet)		
34	11.00sqm (Eleven square metres)	Fabricating Supplying and fixing in position of Aluminium anodised natural colour matt finish 1/3rd fixed glazing 2/3rd prelaminated board of Aluminium partition of size 2.70 mx 2.10 m.The outer frames Outer frame: 63.50x38x3mm@ 1.72 kg/m, Centre mullions: 63.50x38x3mm@ 1.55 kg/m, Alu. Clips: 17.27x17.15x1.50mm @ 0.175kg/mg/m for intermediate vertical mullion 90cm c/c. Horizontal mullion at 1.00m 2.10m covered with 4 mm thick plain glass with necessary aluminium clips of size 17.27x17.15 x1.50mm @ 0.176kg/m and with required rubber beading etc., including necessary dismantling holes in RCC column, masonry wherever in necessary with power drills to the extent required and made good the damaged portion in good condition after fixing as directed by the departmental officers. All the aluminium sections should be anodised not less than 15 microns as ISI specification 1868/1962 / and should be got approved by Executive Engineer before use.	special	1m ² (one square metre)		
35	1075.00kg (One thousand and seventy five kilo grams)	supplying and fixing of window grill using outer alround frame with 25x25x6mm L angle and vertical, horizondal 12mm square rod, including one coat of red oxide primer, including all cost of materials and conveyance labour charges cutting and welding etc, complete.	special	1 kg (One kilo gram)		

36	3.60sqm (Three point six zero square metres)	Supplying and fixing UPVC (Un-Plasticized Polyvinyl Chloride) Louvered Ventilators of from the profile the size of outer frame 60mm x 58mm and shutter profile size of 60 x 78mm both profiles are reinforced with GI/1mm 125GSM and 100% corrosion free, the profile are multi chambered sections with wall thick of 2mm. The EPDM rubber (black colour) covered with all over the edges of frame and shutter. The corners and joints should be welded and cleaned. Radiations pin headed glass 4mm thick should be provided in the louvers. The window should be fixed to the wall with 100% packing with screws and silicon packing all round the frames. The ventilator should be got approved from the Executive Engineer before use on work	special	1m ² (one square metre)		
37	45.00sqm (Fourty five square metres)	Supplying and fixing UPVC (Un-Plasticized Polyvinyl Chloride) Windows of casement type (open) from the profile the size of outer frame 60mm x 58mm and shutter profile are reinforcement with GI/1mm 125GSM and 100% corrosion free, the profiles are multi chambered sections with wall thick of 2mm. The EPDM rubber (black colour) covered with over all the edges of frame and shutter the shutter will be provided with Espag multi power point locks and also it operates as handle. The corners and joints should be welded and cleaned. Radiations free pin headed plain or brown colour glass 4mm thick should be provided to the shutter and it should not allow leakage of water even at most ranging storms and should have key lockable action, security protective hinges, strong locking systems and as per size for arresting noise and energy loss. The connecting mechanism between sash and outer frame that enables opening of the window. The window should be fixed to the wall with 100% packing with screws and silicon packing all round the frames. The window should be got approved from the Executive Engineer before use on work	special	1m ² (one square metre)		
38		Supplying and fixing in position specials type of mirror 650 x 450 X 5.50mm of approved quality mirror, shelf type with hard board backing of approved colour fixed with brass screws, rawl plug, etc., complete complying with standard specification. (The mirror should be got approved by the Executive Engineer before use on woks)	special			
a)	4 nos. (Four numbers)	mirror 650 x 450 X 5.50mm		Each		
b)	4 nos. (Four numbers)	Special Type Mirror of size 1000 x 780mm		Each		

39	8 nos. (Eight numbers)	Supplying and fixing approved best quality brass CP towel rail 600mm long and 20mm dia with brackets of same materials including cost of teak wood plugs and CP screws, etc., complete complying with standard specifications. (The tower rail should be got approved by Executive Engineer before use on works).	special	Each		
40	4 nos. (Four numbers)	Supplying and fixing approved best quality SS Towel Rack 600mm long with Lower Hanger including cost of teak wood plugs and CP screws, etc., complete complying with standard specifications. (The tower rail should be got approved by Executive Engineer before use on works).	special	Each		
41	270.00sqm (Two hundred and seventy square metres)	Providing and fixing of suspended false ceiling with include providing and fixing GI perimeter channel of size 45mm thick having on flange of 30mm and a walls of 27mm along with perimeter of ceiling screw fixed to ceiling and walls suspending 27mm along with perimeter of ceiling screw fixed to ceiling and walls suspending GI intermediate channel of size 45mm of thick with two flange of width 25mmx10mmx0.85mm suspended frame the purlins ceiling section of 45mm thickness having works of 57.5mm and two flange of 26mm ceiling with lips of 10.5mm and then fixed the intermediate channel direction perpendicular to the intermediate channel at 610mm centres 12.5mm tapered edge Perforated Sheets (10mm thick) are to and finished be joints so as to have flush to be which including filling finishing the tapered are square edges of the board with joints compound paper tap etc., complete	special	1m ² (one square metre)		
42	130.00sqm (One hundred and thirty square metres)	Providing and fixing of Pop Cornice Work for 8" Gyp Board False Ceiling including cost of materials, labour charges, transportation and all conveyance charges etc., complete	special	1m ² (one square metre)		
43	8 nos. (Eight numbers)	Supplying and fixing position PVC Nahani Trap of the following sizes with best stainless steel gratings of approved brand and quality, fixed over a bed of brick jelly lime concrete 1:2:5 (One part of lime, two part of sand and five part of 40mm gauge brick jelly) and finished with Cement Mortar 1:3 (One Cement, Three sand) including dismantling masonry works wherever found necessary and making good the dismantled portions to the original condition and giving connection to the CI / PVC pipes, etc., complete complying with standard specification. (The Nahani Trap should be got approved by the Executive Engineer before use on works)	special	Each		

44	4 nos. (Four numbers)	Construction of Inspection chambers of sizes Inspection 0.60x0.60m (inside opening) ,up to 1.25m height with earth work excavation for foundations, 15cm thick C.C 1:5:10 using 40mm HBGS jelly for foundation and birck work in CM 1:5 using country bricks, insides plastering with CM 1:3,20mm thick with WPC , inside channelling with brick work, outside plastering with CM 1:5,12mm thick, RCC precast cover slab 75mm thick using 1:1.2:2.4 using 20mm blue granite jelly with necessary reinforcement etc., complete as directed by the departmental officers.	special	Each		
45	6595.00kg (Six thousand five hundred and ninety five kilo grams)	Supplying ,fabricating and fixing MS Steel truss using 75x75mm L angle , 50x50mm L angle, purlin 80X40 rec.tub,100X50 rec.tub, 75x75 Langle , 8mm thick base plate, MS Chequered Plate 6mm thick, MS Chequered Plate 3mm thick, 40mmx40mm, 25mmx25mm, ISMB 150X75,ISMC 75 including cost of material, labour charges, transportation, and all conveyance charges etc, complete.	86	1 kg (One kilo gram)		
46	355.00sqm (Three hundred and fifty five square metres)	Supplying and fixing profiles colour coated galvalume sheets 0.47mm tk for roofing and gladding using best approved galvalume sheet using SD/ST screws with EPDM metal wshers 3Nos per Sqm with nessary Sealent including all cost of materials labour charges for joints conveyance charges etc., complete	special	1m ² (one square metre)		
47		Supplying and fixing in position best quality PVC soil / waste pipes of 110mm dia having 6 kg / sq.cm. pressure BIS mark and providing leak proof joints using PVC adhesives including fixing to the wall with special PVC / MS clamp, teak wood plugs, brass screws, etc., and making connection to all sanitary fittings, dismantling masonry / RCC works wherever found necessary and making the good dismantled portion to the original condition, including testing for any leakages, etc., complete complying with standard specifications. (The PVC pipes should be got approved by the Executive Engineer before use on works). Above Ground Level	special			
a	75.00m (Seventy five metres)	110mm dia pvc pipe		1m (One metre)		
b	75.00m (Seventy five metres)	75mm dia pvc pipe		1m (One metre)		

48		Supplying and fixing in position PVC specials of the 110mm ,75mm dia and types of approved quality confirming to BIS and providing leak proof joints including fixing to the walls and giving connection to the PVC soil stacks, dismantling the masonry or RCC works and re-doing the dismantled portion to original condition etc., complete complying with standard specifications. (The PVC specials should be got approved by the Executive Engineer before use on works).	special			
a	12 nos. (Twelve numbers)	110mm dia PVC Elbow		Each		
b	4 nos. (Four numbers)	110mm dia PVC bend with Door		Each		
c	12 nos. (Twelve numbers)	75mm dia PVC Elbow		Each		
d	4 nos. (Four numbers)	75mm dia PVC bend with Door		Each		
e	5 nos. Five numbers)	75mm dia PVC Tee		Each		
49		Supplying, laying and jointing UPVC pipes of approved quality of the following sizes including cutting and threading and fixing UPVC specials but excluding cost of such specials and fixing to wall with necessary teak wood plugs, clamps and screws making holes on the wall or drilling holes in roof and making good the dismantled portions to original condition with necessary brick work and concrete and plastering wherever necessary scaffolding charges.	special			
a	12.00Rmt (Twelve running metres)	20mm upvc pipe		1Rmt (One running metre)		
b	20.00Rmt (Twenty running metres)	25mm upvc pipe		1Rmt (One running metre)		
c	50.00Rmt (Fifty running metres)	40mm upvc pipe		1Rmt (One running metre)		

50		Supplying and fixing in position of the following upvc Special of approved Quality including fixing charges etc., complete complying with standard specification	special			
a	5 nos. Five numbers)	20mm Elbow		Each		
b	20 nos. (Twenty numbers)	25mm Elbow		Each		
c	15 nos. (Fifteen numbers)	40mm Elbow		Each		
d	3 nos. (Three numbers)	20mm Bend		Each		
e	3 nos. (Three numbers)	25mm Bend		Each		
f	10 nos. (Ten numbers)	40mm Bend		Each		
g	9 nos. (Nine numbers)	25mmx20mm Reducer Tee		Each		
h	6 nos. (Six numbers)	20mm coupling		Each		
i	12 nos. (Twelve numbers)	25mm coupling		Each		
j	15 nos. (Fifteen numbers)	40mm coupling		Each		
k	5 nos. Five numbers)	25mmx20mm bush		Each		
l	2 nos. (Two numbes)	25mm union		Each		
m	3 nos. (Three numbers)	40mm union		Each		
n	10 nos. (Ten numbers)	20mmx15mm elbow		Each		
o	2 nos. (Two numbes)	40mm tank collar		Each		

51		Supplying and fixing in position first quality and approved variety of UPVC Gate Valve with BIS make of the following 40mm,25mm dia including cost of shellac, thread balls, etc., complete complying with standard specifications (for both internal and external water supply arrangements). The valves to be used on work shall be got approved by the Executive Engineer before use on work.	special			
a	3 nos. (Three numbers)	40mm dia UPVC Gate Valve		Each		
b	12 nos. (Twelve numbers)	20mm dia Angle valve		Each		
52		Supplying and fixing in position 15mm dia brass CP screw down tap / Pillar tap (heavy duty) of approved make conforming to BIS specifications and quality including cost of shellac, thread, etc., complete complying with standard specification and including cutting and threading wherever necessary. (Taps should be got approved by the Executive Engineer before use on the works)	special			
a	8 nos. (Eight numbers)	15mm dia SD Tap		Each		
b	4 nos. (Four numbers)	15mm dia Pillar Tap		Each		
53	75.00Rmt (Seventy five running metres)	Supplying and fixing in position best approved of BIS quality 110mm dia PVC rain water down fall pipes having a pressure of 4 kg. / sq.cm including cost of necessary PVC shoe, PVC bend, cast iron gratings of required diameter and special clamps, brass screws, nails, etc., and fixing of cast iron gratings at junction of parapet and the RCC roof slab including finishing neatly etc., complete. The rate shall be inclusive of cast of removable cast iron grating. The PVC pipe shall be fixed in wall with special type of "U" clamp at the centre of the pipe line in addition to those for more than 3.0 metre pipe length, etc., complete complying with standard specification.	special	1Rmt (One running metre)		
54	4 nos. (Four numbers)	Supplying and fixing best approved best quality CP Health Facet with Stop cock of size 150 x 150mm including cost of teak wood plugs, brass screws, etc., complete complying with standard specifications. (The soap tray should be got approved by Executive Engineer before use on works).	special	Each		

55	2 nos. (Two numbes)	Supplying and fixing 2000liter pvc water tank including cost of materials, labour charges, transportation charges etc., complete complying with standard specifications. (The water tank should be got approved by Executive Engineer before use on works).	special	Each		
56	48.00Rmt (Fourty eight running metres)	Manufacturing, Supplying and Fixing of Stainless Steel Hand rails for staircase near wet riser using 50mm dia 304L Grade Stainless Steel pipe of 1.60mm thick will be provided with tubular supports made of 304L Grade Stainless Steel pipe of 25mm dia of 1.60mm thick welded to the railing. The supports will be grouted into the wall and provided with 93.00mm thick Stainless Steel circular base plate of 304 Grade. The rate shall included for grouting into concrete with necessary supporting arrangements the hand rail in floor polishing buffing, bonding, cutting, grinding, conveyance, welding charges, electrical charges, etc. complete	special	1Rmt (One running metre)		
57	1073.50 sqm (One thousand and seventy three point five zero square metres)	Painting two coats of newly plastered wall surface with water based exterior emulsion paint of first class quality and of approved colour over a priming coat including thorough scrapping, clean removal of dirt, and including fully plaster of paris putty, wherever required etc., complete complying with standard specification.	66	1m ² (one square metre)		
58	1320.00sqm (One thousand three hundred and twenty square metres)	Painting two coats of old plastered wall surface with water based exterior emulsion paint of first class quality and of approved colour over a priming coat including thorough scrapping, clean removal of dirt, and including fully plaster of paris putty, wherever required etc., complete complying with standard specification.	66	1m ² (one square metre)		
59	320.00sqm (Three hundred and twenty square metres)	Painting new iron works such as steel doors, windows, ventilators, window bars, balustrades etc., with two coats of best approved first quality and colour of synthetic enamel paint over the existing red oxide priming coat in all floors excluding cost of priming coat etc., complete complying with standard specification. (The make, quality and colour of paint should be got approved by the Executive Engineer before use on works.)	66	1m ² (one square metre)		

60	6.50sqm (Six point five zero square metres)	Painting new wood work with two finishing coats of synthetic enamel ready mixed paint of approved quality and colour over one coat priming coat in all floors including the cost of primer etc., complete complying with standard specification. (The make, quality and colour of paint should be got approved by the Executive Engineer before use on works.)	66	1m ² (one square metre)		
61	12.00sqm (Twelve square metres)	Painting old wood work with two finishing coats of synthetic enamel ready mixed paint of approved quality and colour in all floors etc., complete complying with standard specification. (The make, quality and colour of paint should be got approved by the Executive Engineer before use on works.)	66	1m ² (one square metre)		
		C GST 6%				
		S GST 6%				
		Total Amount				