





1. A 1500x1500x22mm F WOOD SHUTTER BOARD IS TO BE PLACED OVER THE 900 DIA. INLET
2. 250mm OF CLASS 19/25 CONCRETE, REINFORCED WITH TWO LAYERS (TOP AND BOTTOM) OF RF. 617 MESH
3. THE TRAPEZOIDAL CLEAN WATER CHANNEL IS TO BE BACKFILLED TO SURFACE WITH SELECTED G5 SOIL, COMPACTED IN LAYERS TO 93% MOD AASHTO DENSITY
4. THE LINER SYSTEM FOR THE NEXT PHASE IS TO BE LAID OVER

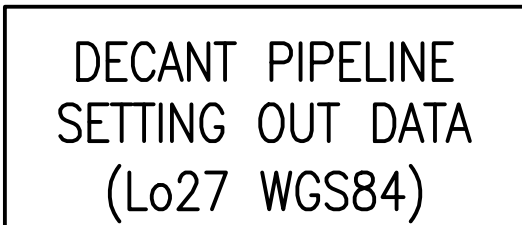

POINT	X	Y
SOP-01	2623670.668	-60221.300
SOP-02	2623549.004	-60170.738
SOP-03	2623470.370	-60138.058

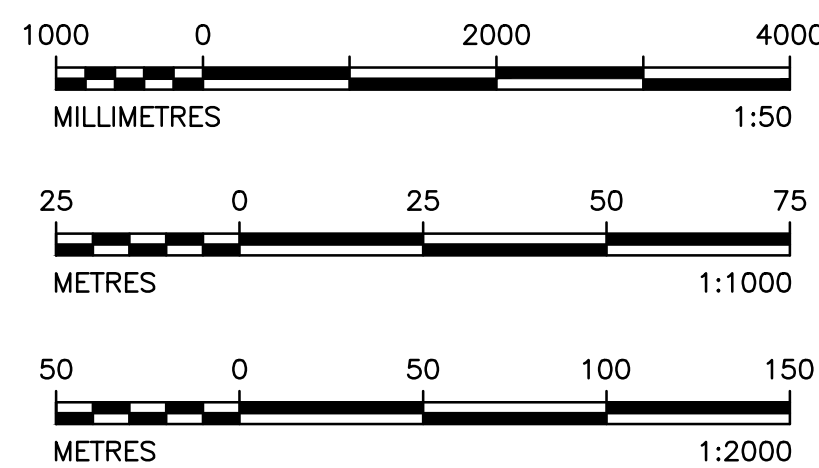

DISCLAIMER

This drawing, was prepared by Knight Pésold Consulting (Pty) Ltd based on the best information available at the time of preparation. During construction site conditions, or site conditions, or site developments, may possibly dictate that amendments or adaptations be made to certain details on the drawing. Strict compliance with the project specifications is also essential. Knight Pésold Consulting (Pty) Ltd will therefore not accept liability for any losses, damages or consequential losses, suffered by any party resulting from the use or implementation of the contents of this drawing, if executed or amended without fulltime supervision by Knight Pésold Consulting (Pty) Ltd.

[illegible]

FOR CONSTRUCTION