
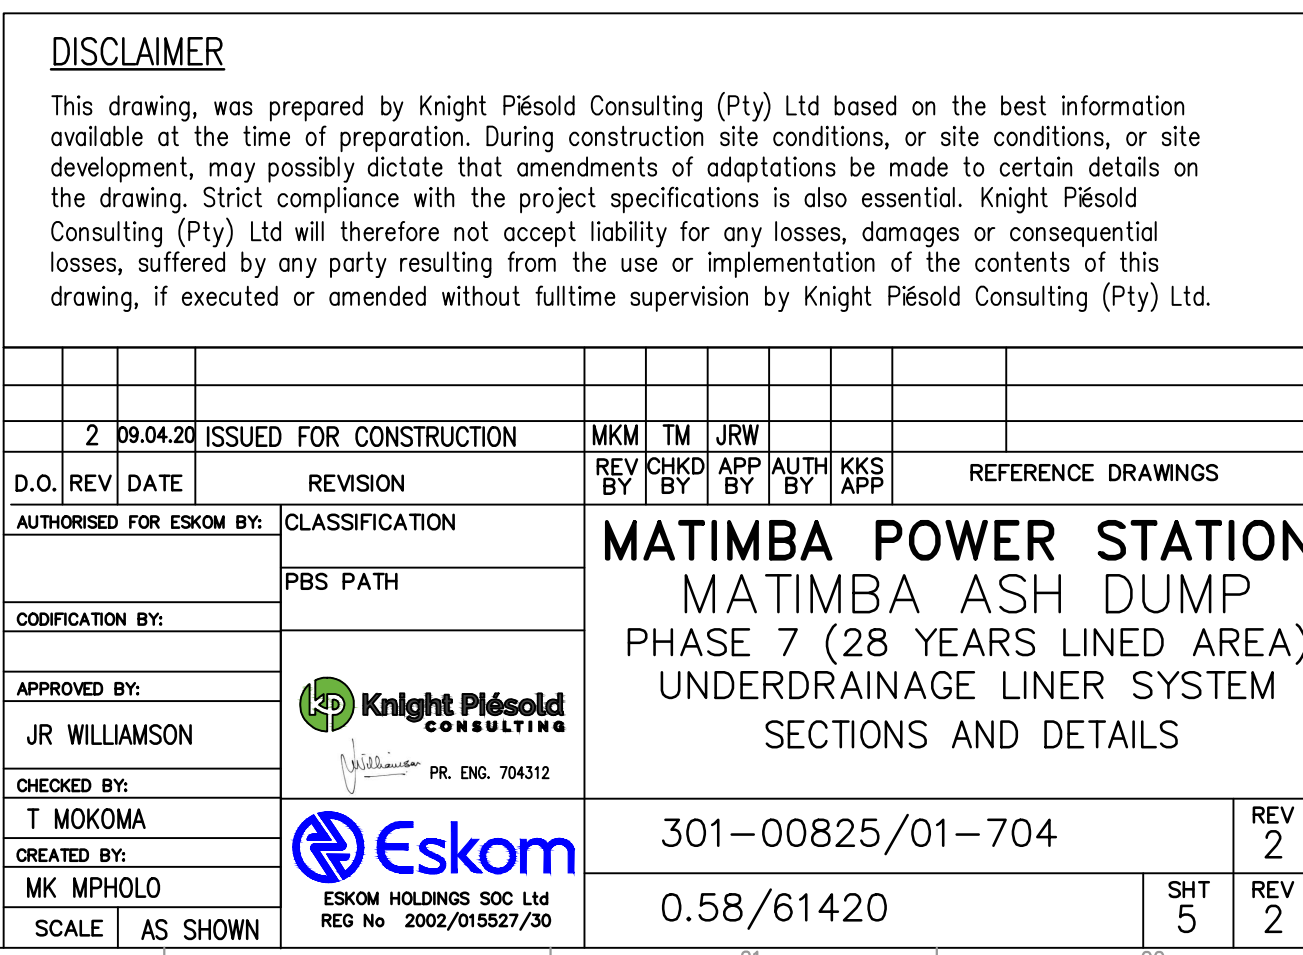


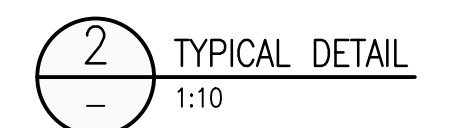

NOTES:

1. CONCRETE 30/19
2. REINFORCEMENT 617 MESH
3. WELD TO BE DONE ACCORDING TO INDUSTRY STANDARDS.
4. WELD TO BE TESTED FOR LEAKS.
5. ALL PIPEWORK OVERLAY BY ASH IS TO BE SLOTTED, PIPEWORK UNDER STARTER/TOE WALLS ARE TO BE UNSLOTTED.