

CE-28/2022-23

FLEXIBLE COUPLING WITH RUBBER PADS FOR CWP


Drawn

MOTOR SIDE (TOP)

435 PCD (typ)
 $\phi 485$ (typ)
 $\phi 493$ (typ)

MAXIMUM PERMISSIBLE SPEED : 2300 rpm
 ALLOWABLE MISALIGNMENT:
 RADIAL (mm) : 2.1
 AXIAL (mm) : 2.5
 CONICAL (°) : 0.5

Split ring for removal
 & free run of motor

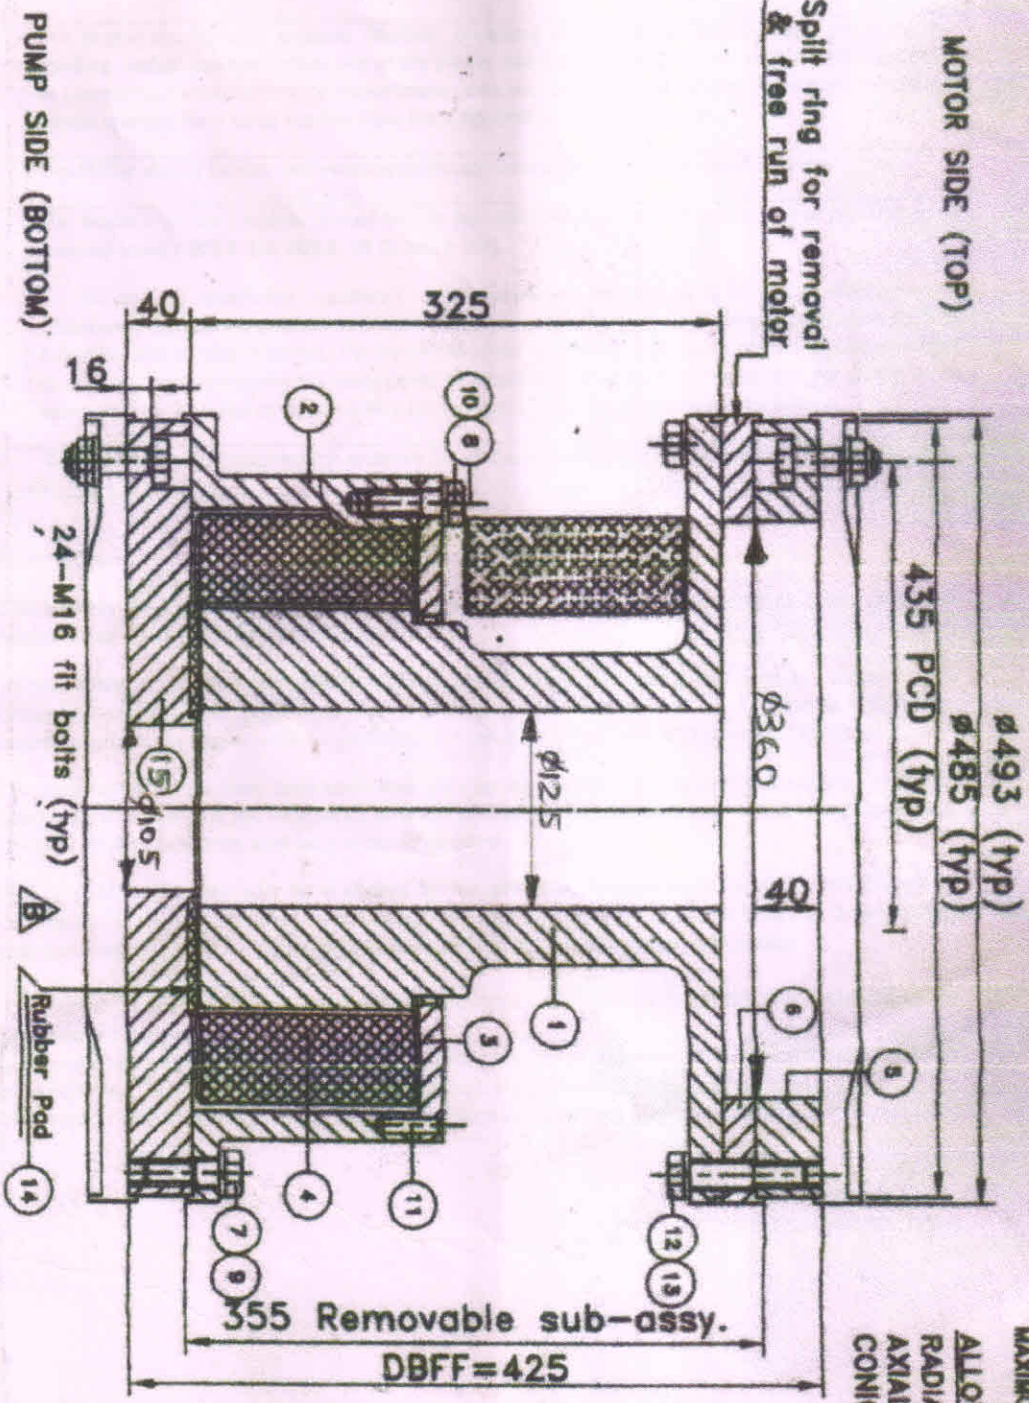

PUMP SIDE (BOTTOM)

JE/M/CWPH/CAD

AEE/M/CAD

EE/M/CAD

Handwritten signature

Handwritten signature

Handwritten signature

FLEXIBLE COUPLING WITH RUBBER PADS

BOM AS PER ANNEXURE

NORTH CHENNAI THERMAL POWER STATION, STAGE-I

ATHIPATTU